

Data sheet for three-phase Squirrel-Cage-Motors Innomotics



Motor type : 1AV3083B INNOMOTICS GP - 80 M - IM B3 - 4p

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks

Electrical data														Safe Area			
U [V]	Δ / Y	f [Hz]	P [kW]	P [hp]	I [A]	n [1/min]	M [Nm]	η ³⁾			cosφ ³⁾			I _A /I _N	M _A /M _N	M _K /M _N	IE-CL
								4/4	3/4	2/4	4/4	3/4	2/4				
DOL duty (S1) - 155(F) to 130(B)																	
230	Δ	50	0.75	-/-	3.05	1450	5.0	82.5	82.3	80.1	0.75	0.67	0.55	7.1	2.7	3.9	IE3
400	Y	50	0.75	-/-	1.75	1450	5.0	82.5	82.3	80.1	0.75	0.67	0.55	7.1	2.7	3.9	IE3
460	Y	60	0.86	-/-	1.72	1750	4.7	83.5	83.1	80.7	0.75	0.67	0.55	7.7	2.7	4.1	IE3
460	Y	60	0.75	-/-	1.59	1760	4.0	83.5	82.6	79.7	0.71	0.63	0.50	8.3	3.1	4.7	IE3
IM B3 / IM 1001		FS 80 M		IP55		UKCA		IEC/EN 60034			IEC, DIN, ISO, VDE, EN						
Environmental conditions : -20 °C - +40 °C / 1000 m									Locked rotor time (hot / cold) : 17.20 s 20.50 s								

Mechanical data

Sound level (SPL / SWL) at 50Hz 60Hz	/ dB(A) ^{2) 3)}	/ dB(A) ^{2) 3)}	Vibration severity grade	A
Moment of inertia	0.0029 kg m²		Thermal class	F
Bearing DE NDE	6004 2Z C3	6004 2Z C3	Duty type	S1
Bearing lifetime			Direction of rotation	bidirectional
L _{10mh} F _{Rad min} for coupling operation 50 60Hz ¹⁾	40000 h	32000 h	Frame material	aluminum
Regreasing device	Without		Net weight of the motor (IM B3)	14 kg
Grease nipple	-/-		Coating (paint finish)	Standard paint finish C2
Type of bearing	Preloaded bearing DE		Color, paint shade	RAL7030
Condensate drainage holes	Without		Motor protection	(B) 1 PTC thermistor - for tripping (2 terminals)
External earthing terminal	Without		Method of cooling	IC411 - self ventilated, surface cooled

Terminal box

Terminal box position	top	Main cable entry	1xM25x1.5
Material of terminal box	Aluminium	Main cable gland	1 plug
Type of terminal box	TB1 E00	Auxiliary cable entry	1xM16x1.5
Contact screw thread	3xM4	Auxiliary cable gland	1 plug
Max. cross-sectional area	4.0 mm²		

I_A/I_N = locked rotor current / current nominal
M_K/M_N = locked rotor torque / torque nominal
M_K/M_N = break down torque / nominal torque
1) L_{10mh} according to DIN ISO 281 10/2010
2) at rated power / at full load
3) Value is valid only for DOL operation with motor design IC411

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Responsible department IN LV	Technical reference	Created by IPC	Approved by	Technical data are subject to change! There may be discrepancies between calculated and rating plate values.		Link documents	
INNOMOTICS	Document type Technical data sheet			Document status Released			
	Document title 1LE1003-0DB32-2AB4-Z H01			Document number TDS-260512-131946			
Restricted © Innomotics 2026				Revision AA	Creation date 2026-05-12	Language en	Page 1/2

Data sheet for three-phase Squirrel-Cage-Motors Innomotics



Motor type : 1AV3083B

INNOMOTICS GP - 80 M - IM B3 - 4p

Special design

H01 Bolted on mounting feet (instead of cast)

I_{Δ}/I_N = locked rotor current / current nominal
 M_{Δ}/M_N = locked rotor torque / torque nominal
 M_b/M_N = break down torque / nominal torque

1) $L_{100\%}$ according to DIN ISO 281 10/2010
2) at rated power / at full load

3) Value is valid only for DOL operation with motor design IC411

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Responsible department IN LV	Technical reference	Created by IPC	Approved by	Technical data are subject to change! There may be discrepancies between calculated and rating plate values.		Link documents	
INNOMOTICS	Document type Technical data sheet			Document status Released			
	Document title 1LE1003-ODB32-2AB4-Z H01			Document number TDS-260512-131946			
Restricted © Innomotics 2026				Revision AA	Creation date 2026-05-12	Language en	Page 2/2


Copyright reserved. All rights reserved. No part of this document may be reproduced without prior written permission from Innomotics.

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment or damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Weiergabe sowie Vervielfältigung, Verbreitung und/oder Bearbeitung dieses Dokumentes, Verwertung und Mitteilung seines Inhaltes sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten.

Contit à titre de secret d'entreprise. Tous droits réservés. Comunicado como secreto empresarial. Reservados todos os direitos. Доверженост в качестве промышленного секрета. Все права сохраняются за нами. Confiado como secreto de empresa. Nos reservamos todos los derechos.

F

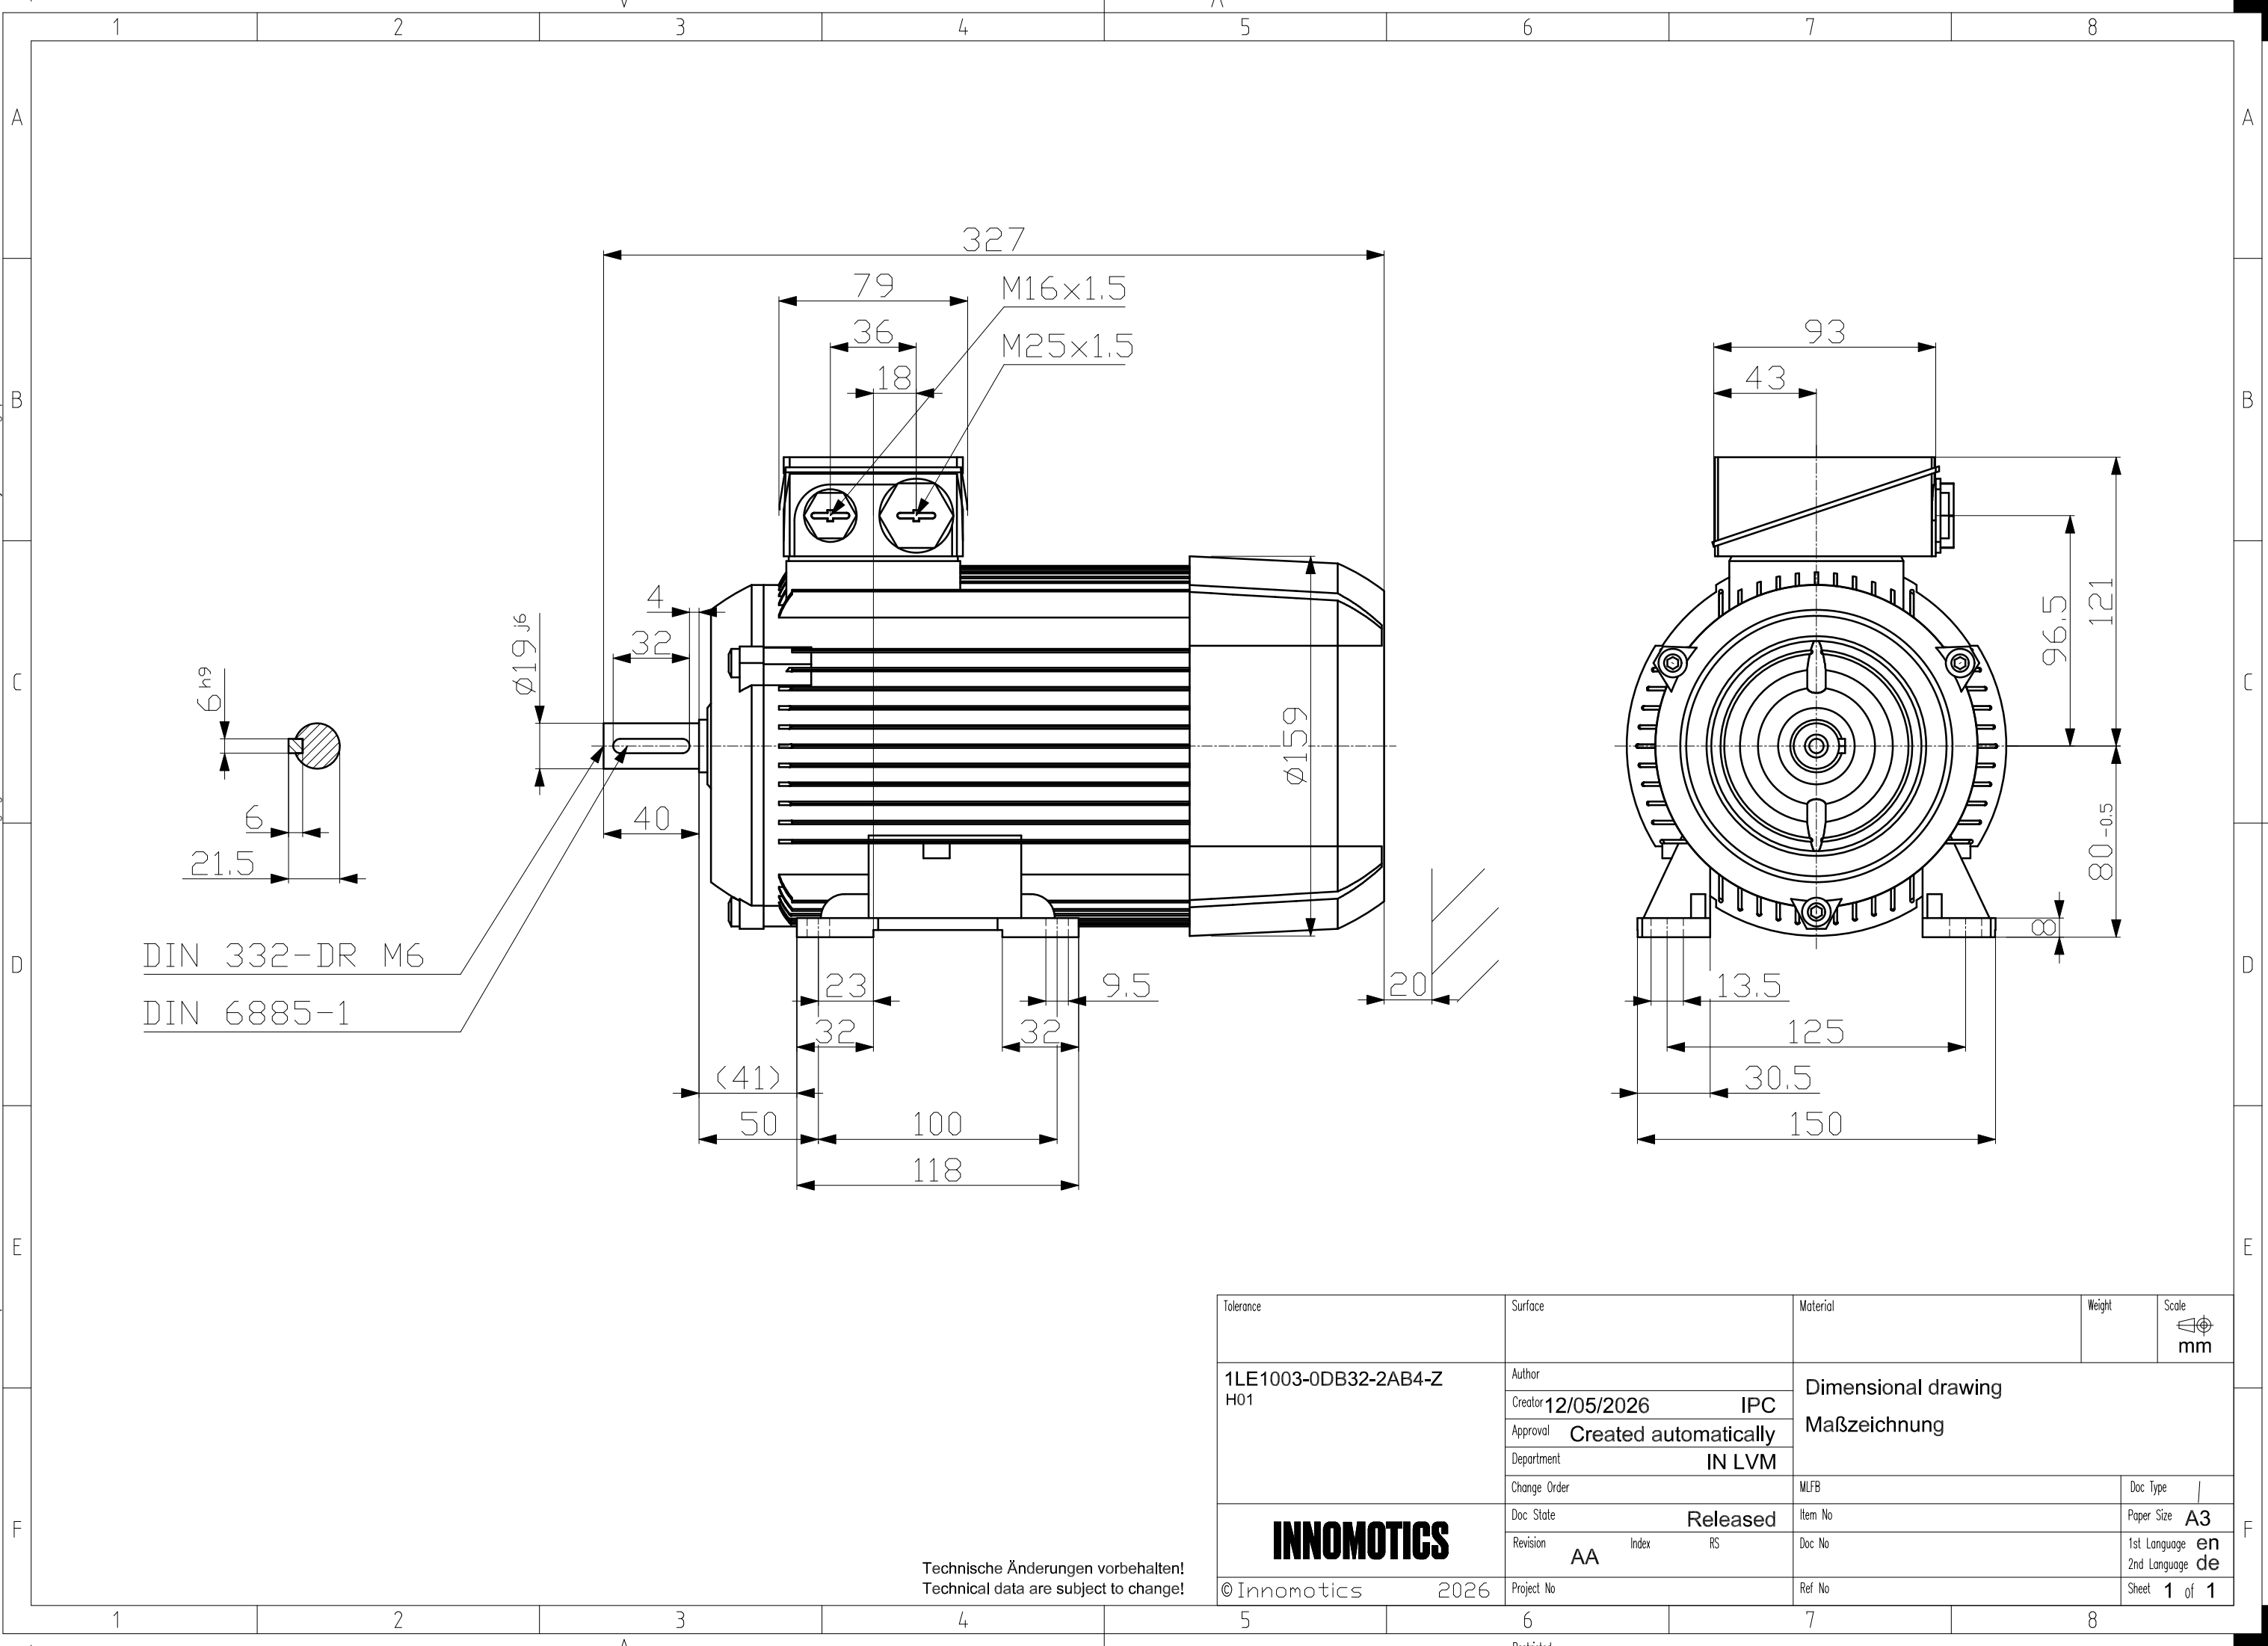

Technische Änderungen vorbehalten!
Technical data are subject to change!

Tolerance	Surface	Material	Weight	Scale  mm
1LE1003-0DB32-2AB4-Z H01	Author	Dimensional drawing Maßzeichnung		
	Creator 12/05/2026 IPC			
	Approval Created automatically			
	Department IN LVM			
Change Order		MLFB	Doc Type /	
INNOMOTICS		Doc State Released	Item No	Paper Size A3
		Revision AA Index RS	Doc No	1st Language en
				2nd Language de
© Innomotics 2026	Project No	Ref No		Sheet 1 of 1