

Data sheet for three-phase Squirrel-Cage-Motors Innomotics



Motor type : 1AV3162B INNOMOTICS GP - 160 M - IM B3 - 4p

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks

Electrical data														Safe Area				
U [V]	Δ / Y	f [Hz]	P [kW]	P [hp]	I [A]	n [1/min]	M [Nm]	η ³⁾			cosφ ³⁾			I _A /I _N	M _A /M _N	M _K /M _N	IE-CL	
								4/4	3/4	2/4	4/4	3/4	2/4					
DOL duty (S1) - 155(F) to 130(B)																		
400	Δ	50	11.00	-/-	21.00	1470	71.0	91.4	91.9	91.9	0.82	0.76	0.65	8.0	2.5	3.5	IE3	
690	Y	50	11.00	-/-	12.30	1470	71.0	91.4	91.9	91.9	0.82	0.76	0.65	8.0	2.5	3.5	IE3	
460	Δ	60	12.60	-/-	20.50	1765	68.0	92.4	92.9	92.6	0.83	0.78	0.68	8.1	3.3	3.5	IE3	
460	Δ	60	11.00	-/-	18.40	1775	59.0	92.4	92.6	92.0	0.81	0.75	0.63	9.0	3.8	4.0	IE3	
IM B3 / IM 1001		FS 160 M				IP55	UKCA	IEC/EN 60034			IEC, DIN, ISO, VDE, EN							
Environmental conditions : -20 °C - +40 °C / 1000 m									Locked rotor time (hot / cold) : 26.50 s 34.30 s									

Mechanical data

Sound level (SPL / SWL) at 50Hz 60Hz	67.0 / 75.0 dB(A) ²⁾ ₃₎	70.0 / 78.0 dB(A) ²⁾ ₃₎	Vibration severity grade	A
Moment of inertia	0.0583 kg m²		Thermal class	F
Bearing DE NDE	6209 2Z C3	6209 2Z C3	Duty type	S1
Bearing lifetime			Direction of rotation	bidirectional
L _{10mh} F _{Rad min} for coupling operation 50 60Hz ¹⁾	40000 h	32000 h	Frame material	aluminum
Regreasing device	Without		Net weight of the motor (IM B3)	78 kg
Grease nipple	-/-		Coating (paint finish)	Standard paint finish C2
Type of bearing	Locating bearing NDE		Color, paint shade	RAL7030
Condensate drainage holes	Without		Motor protection	(A) without (Standard)
External earthing terminal	Without		Method of cooling	IC411 - self ventilated, surface cooled
			Carbon footprint (without options)	403kg

Terminal box

Terminal box position	top	Max. cross-sectional area	16.0 mm²
Material of terminal box	Aluminium	Main cable entry	2xM40x1.5
Type of terminal box	TB1 J00	Main cable gland	2 plugs
Contact screw thread	6xM5		

I_A/I_N = locked rotor current / current nominal
M_r/M_N = locked rotor torque / torque nominal
M_K/M_N = break down torque / nominal torque
1) L_{10mh} according to DIN ISO 281 10/2010
2) at rated power / at full load
3) Value is valid only for DOL operation with motor design IC411

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Responsible department IN LV	Technical reference	Created by IPC	Approved by	Technical data are subject to change! There may be discrepancies between calculated and rating plate values.		Link documents	
INNOMOTICS	Document type Technical data sheet			Document status Released			
	Document title 1LE1003-1DB23-4AA4-Z H01			Document number TDS-260512-133257			
Restricted © Innomotics 2026				Revision AA	Creation date 2026-05-12	Language en	Page 1/2

INNOMOTICS GP - 160 M - IM B3 - 4p

H01	Bolted on mounting feet (instead of cast)
-----	---

3) Value is valid only for DOL operation with motor design IC411


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Responsible department IN LV	Technical reference	Created by IPC	Approved by	Technical data are subject to change! There may be discrepancies between calculated and rating plate values.		Link documents 	
	Document type Technical data sheet			Document status Released			
	Document title 1LE1003-1DB23-4AA4-Z H01			Document number TDS-260512-133257			
Restricted © Innomotics 2026				Revision AA	Creation date 2026-05-12	Language en	Page 2/2

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment or damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Weitergabe sowie Vervielfältigung, Verbreitung und/oder Bearbeitung dieses Dokumentes, Verwertung und Mitteilung seines Inhaltes sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten.

Confie à titre de secret d'entreprise. Tous droits réservés. Communiqué como secreto empresarial. Reservados todos os direitos. Довіряється в якості секрету підприємства. Всі права захищені. Confiado como secreto de empresa. Nos reservamos todos los derechos.

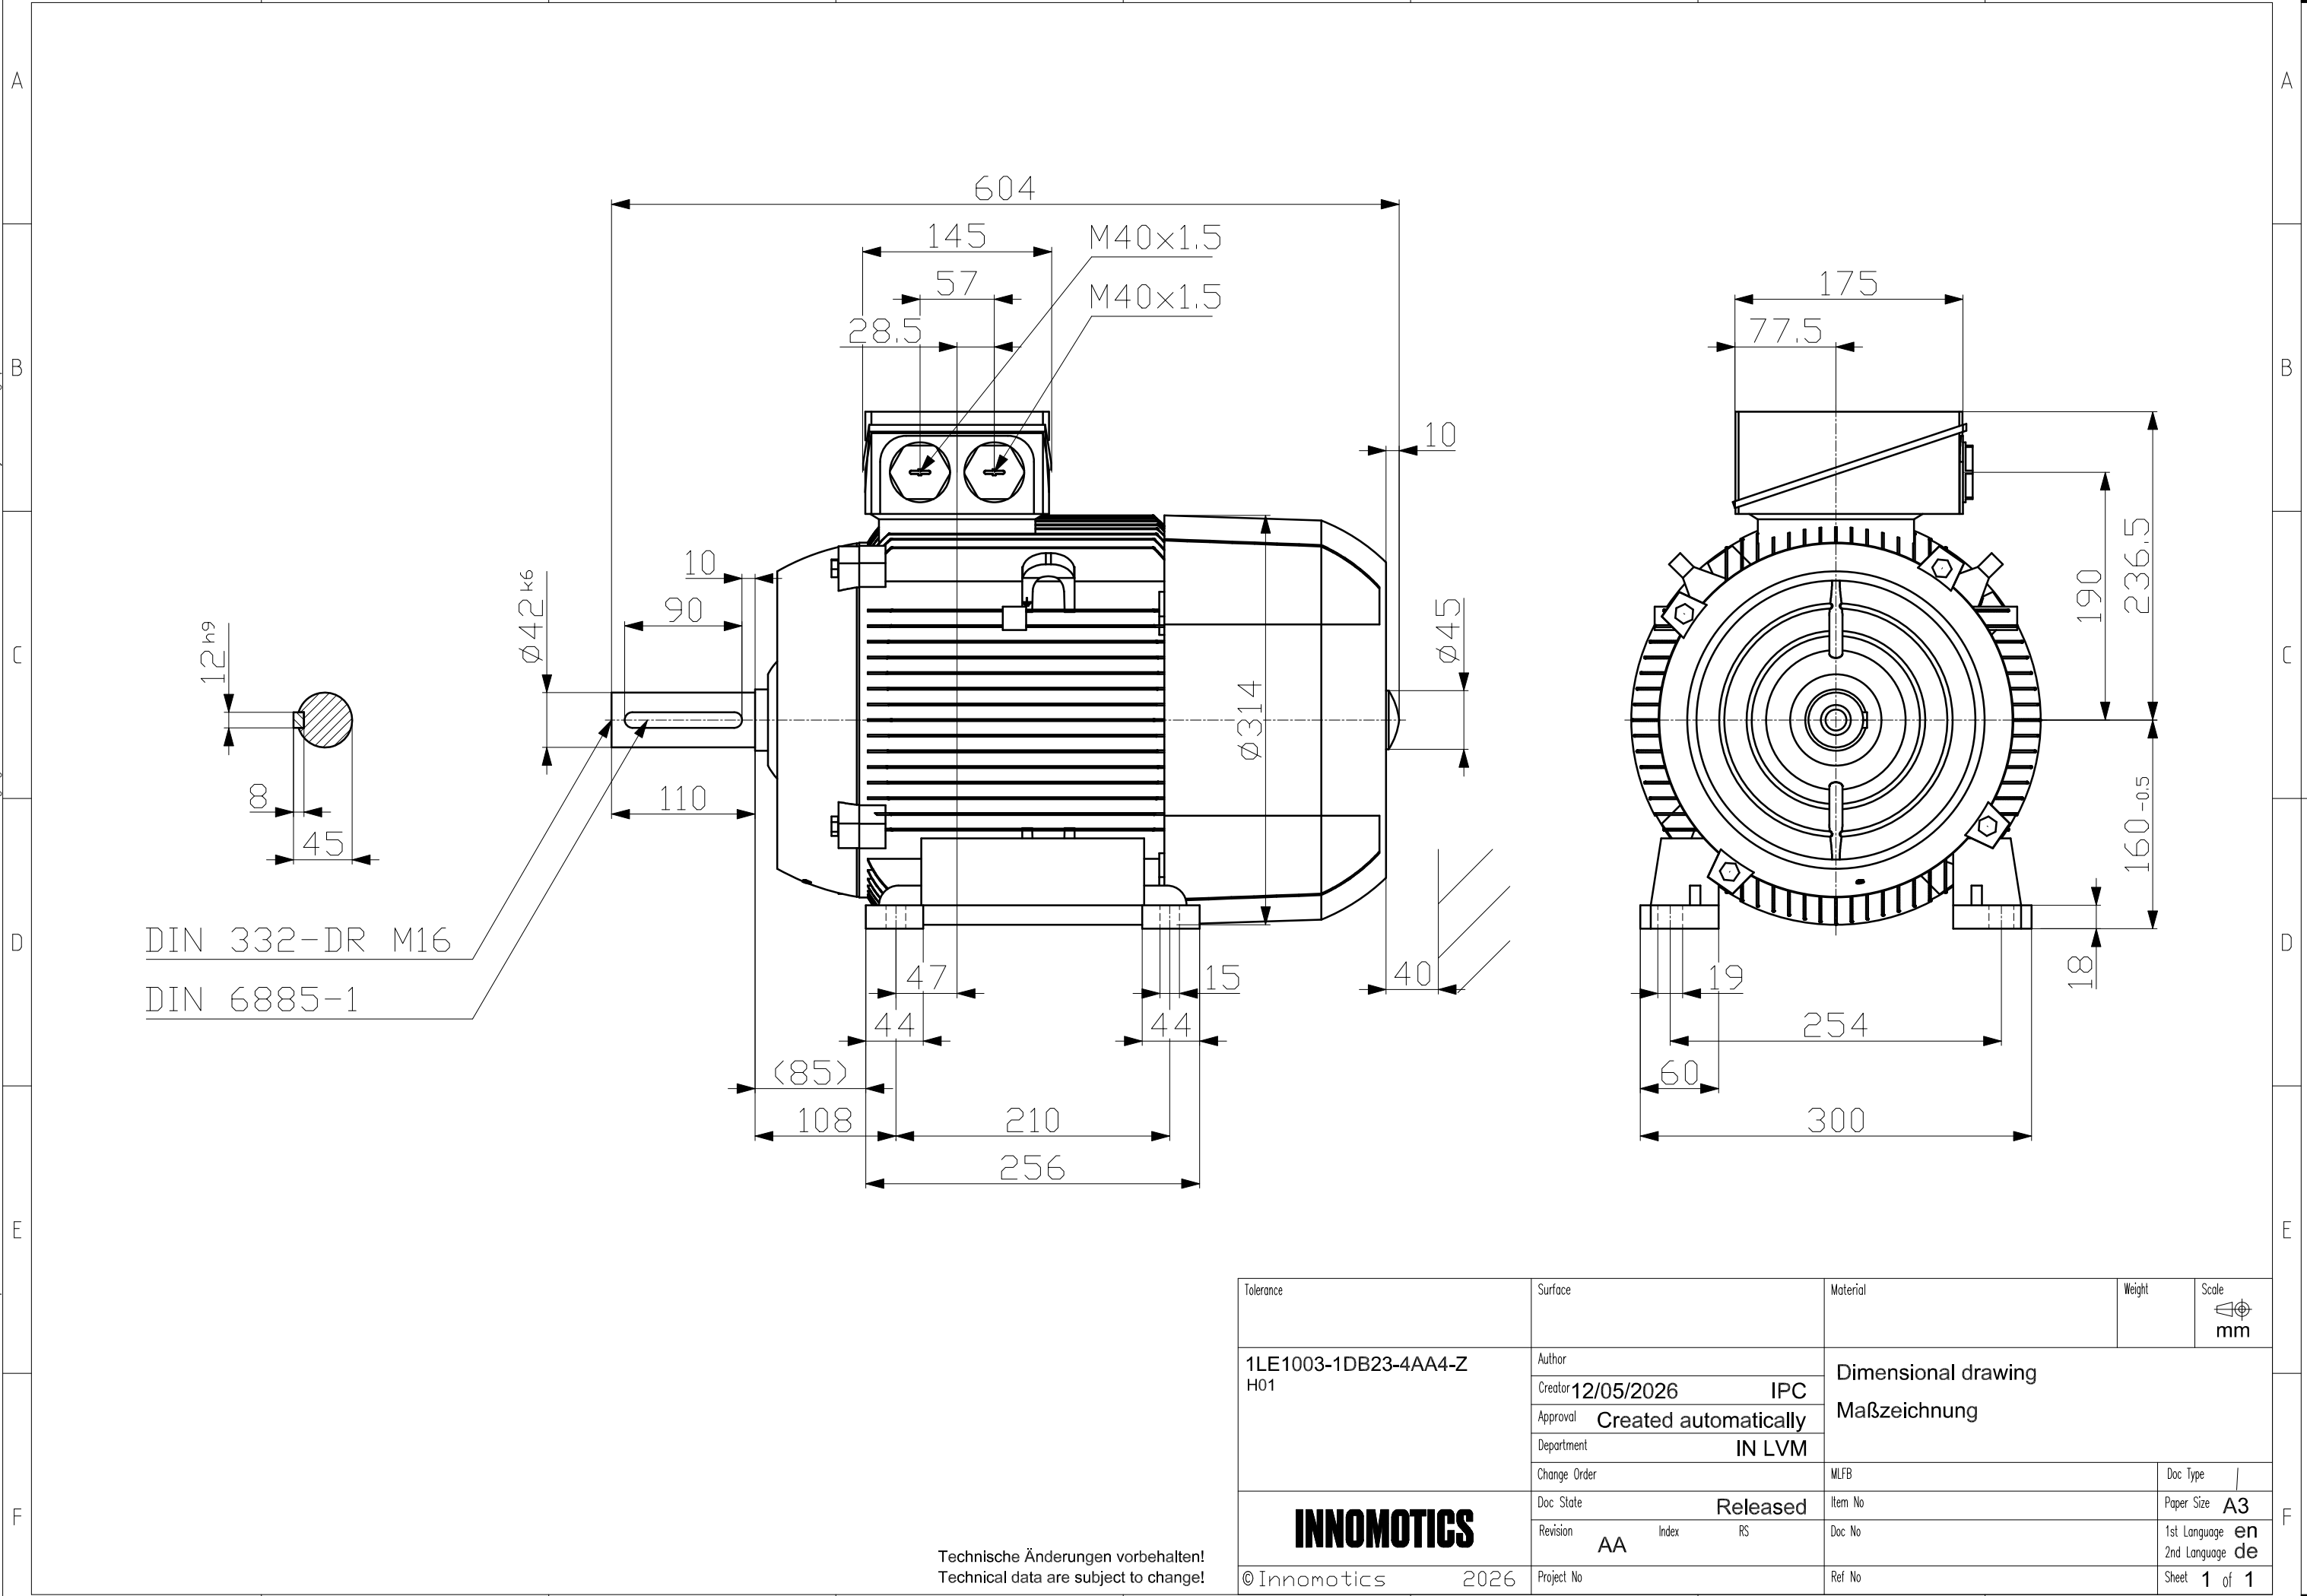

Technische Änderungen vorbehalten!
Technical data are subject to change!

Tolerance	Surface	Material	Weight	Scale  mm
1LE1003-1DB23-4AA4-Z H01	Author	Dimensional drawing Maßzeichnung		
	Creator12/05/2026IPC			
	ApprovalCreated automatically			
	DepartmentIN LVM			
Change Order		MLFB	Doc Type	
INNOMOTICS		Doc StateReleased	Paper SizeA3	
		RevisionAAIndexRS	1st Languageende	
		Project No	Sheet1 of 1	
©Innomotics2026		Ref No		