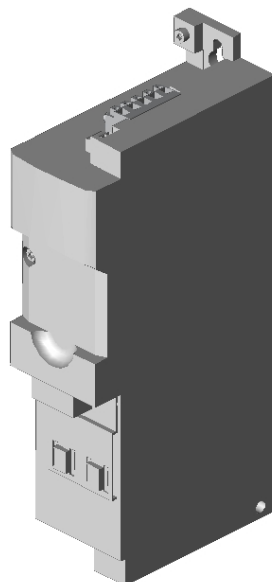



**i550 Frequency inverter****I55AE211F10V10000S**

Note: The model shown is a simplified representation. Minor deviations may occur.

16064661\_3D.stp  
16064661\_datatable.csv  
16064661\_datatable.xls

**3D Handling Commands****Technical product information****i550 Frequency inverter****Inverter****i550-C1.1/400-3****Type****I55AE211F10V10000S**

Rated power  
Rated mains voltage  
Output current  
RFI filter  
Output frequency  
I/O extension  
Enclosure  
Mounting location  
Weight / unit




1.1 kW/1.5 HP  
3/PE 400/480 V AC  
3.2/3 A  
Integrated  
0-599 Hz  
Standard I/O  
IP20  
Control cabinet  
1.510 KG

0.75 kW ... 4 kW

The dimensions in mm apply to:

|         |           |           |           |           |           |
|---------|-----------|-----------|-----------|-----------|-----------|
| 0.75 kW | I55AE175A |           |           |           |           |
| 1.1 kW  | I55AE211A | I55AE211B | I55AE211D | I55AE211F |           |
| 1.5 kW  |           | I55AE215B | I55AE215D | I55AE215F |           |
| 2.2 kW  |           | I55AE222B | I55AE222D | I55AE222F |           |
| 3 kW    |           |           |           |           | I55BE230F |
| 4 kW    |           |           |           |           | I55BE240F |
| Weight  | 1.35 kg   | 1.35 kg   | 1.35 kg   | 1.35 kg   | 1.35 kg   |

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

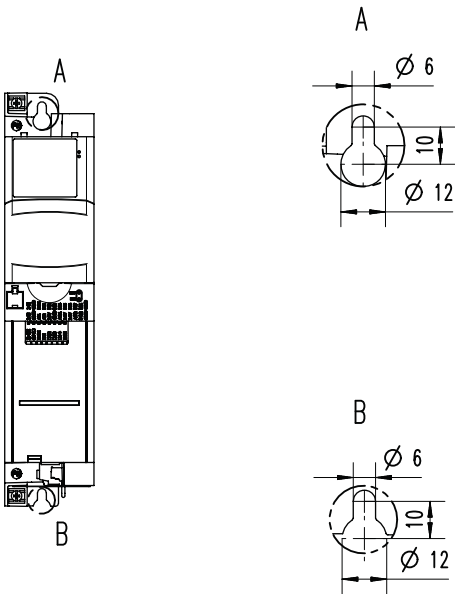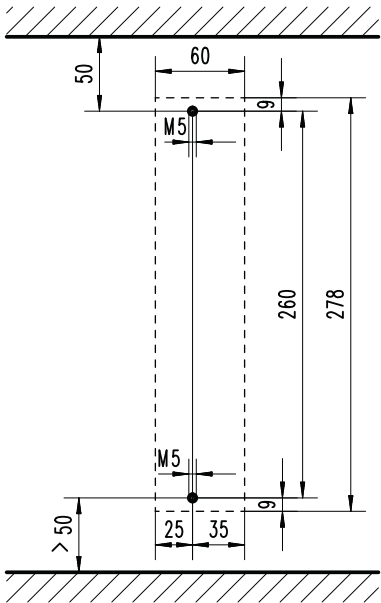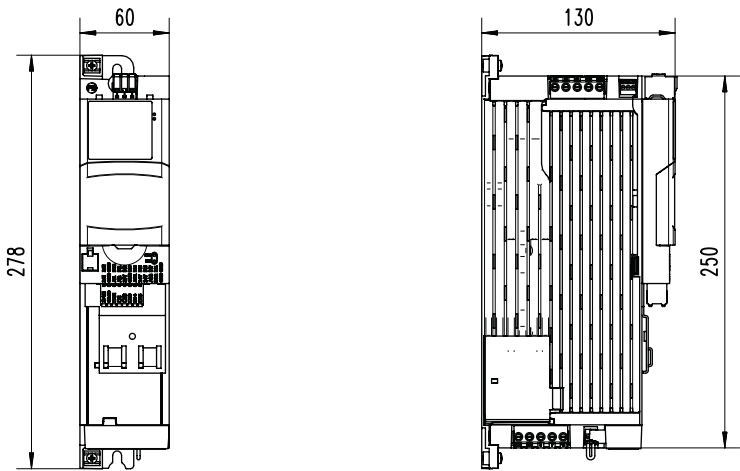


8800265

1 hp ... 5 hp

The dimensions in inch apply to:

|        |           |           |           |           |           |
|--------|-----------|-----------|-----------|-----------|-----------|
| 1 hp   | I55AE175A |           |           |           |           |
| 1.5 hp | I55AE211A | I55AE211B | I55AE211D | I55AE211F |           |
| 2 hp   |           | I55AE215B | I55AE215D | I55AE215F |           |
| 3 hp   |           | I55AE222B | I55AE222D | I55AE222F |           |
| 4 hp   |           |           |           |           | I55BE230F |
| 5 hp   |           |           |           |           | I55BE240F |
| Weight | 3 lb      | 3 lb      | 3 lb      | 3 lb      | 3 lb      |

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

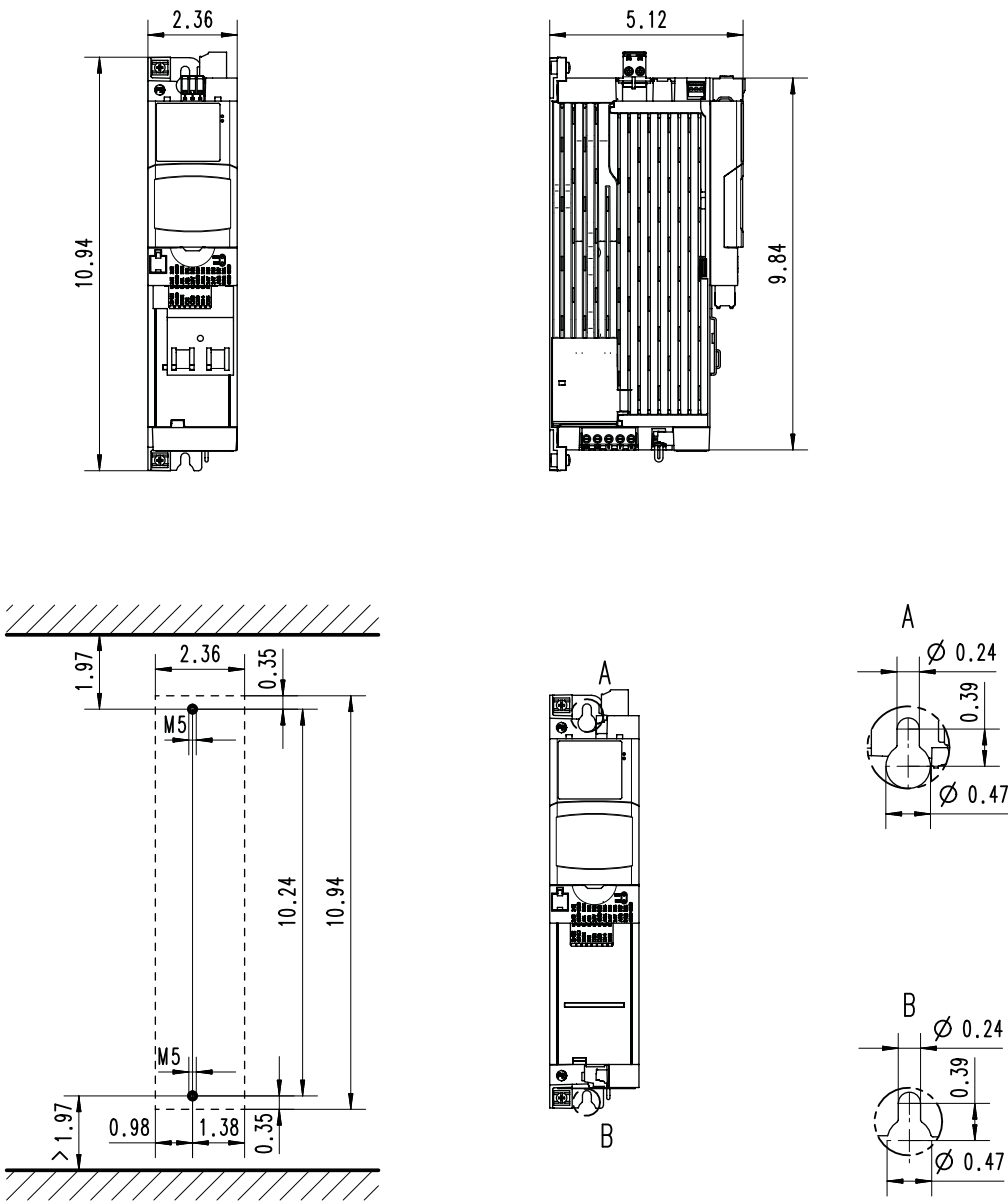

8800300