


Technical Data Sheet  
Electric Motor 1 phase in Aluminum IE1

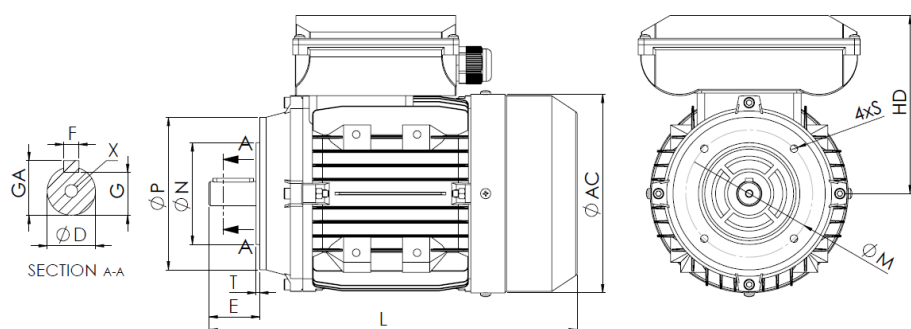

L (standard motor)

416

L (motor w/brake)

NA

L (motor w/forced ventilation)

522

L (motor without ventilation)

320

| Feet |   |   |   |   | Shaft |    |   |    |    |        | Carcass |    |     |     | Flange |     |     |    |     |
|------|---|---|---|---|-------|----|---|----|----|--------|---------|----|-----|-----|--------|-----|-----|----|-----|
| H    | A | B | C | K | D     | E  | F | G  | GA | X      | AB      | BB | AC  | HD  | M      | N   | P   | S  | T   |
| -    | - | - | - | - | 28j6  | 60 | 8 | 24 | 31 | M10x22 | -       | -  | 199 | 167 | 130    | 110 | 160 | M8 | 3.5 |

### Electrical Data

|                 |            |       |
|-----------------|------------|-------|
| Type            | UCC 100L-4 |       |
| Poles           | 4/1500     | Poles |
| Power           | 2.20       | Kw    |
| Voltage         | 230        | V     |
| Frequency       | 50         | Hz    |
| Speed           | 1400       | rpm   |
| Nominal current | 12.90      | A     |
| Power factor    | 0.93       |       |
| Efficiency 100% | 79.7       | %     |
| Efficiency 75%  | -          | %     |
| Efficiency 50%  | -          | %     |
| Torque          | 15.01      | N.m   |
| Ta/Tn           | 2.5        |       |
| Ia/In           | 5.9        |       |
| Tm/Tn           | 1.7        |       |

### Mechanical Data

|                       |            |
|-----------------------|------------|
| Shaft height          | -          |
| Construction form     | B14        |
| Mechanical protection | 55         |
| Heating class         | B          |
| Insulation class      | F          |
| Service               | S3-70%     |
| Ambient temp.         | -10°C-40°C |
| Altitude              | 1000       |
| Noise                 | - dB(A)    |
| Weight                | 26 kg      |
| Bearing DE            | 6206 2Z C3 |
| Bearing NDE           | 6206 2Z C3 |

### Extra Data

#### Applicable brakes

|          |    |              |    |     |
|----------|----|--------------|----|-----|
| DC brake | NA | Brake torque | NA | N.m |
| AC brake | NA | Brake torque | NA | N.m |

#### Applicable forced ventilations

|                                 |       |    |   |
|---------------------------------|-------|----|---|
| Single-phase forced ventilation | Power | 65 | W |
| Three-phase forced ventilation  | Power | NA | W |