



Technical Data Sheet
Electric Motor 1 phase in Aluminum IE1

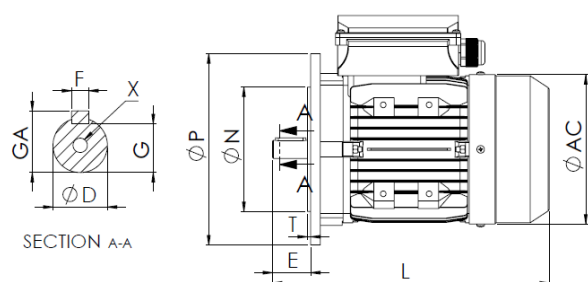

L (standard motor)

252

L (motor w/brake)

NA

L (motor w/forced ventilation)

349

L (motor without ventilation)

218

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	14j6	30	5	11	16	M5x12	-	-	139	127	130	110	160	10	3.5

Electrical Data

Type	UCC 71K-2		
Poles	2/3000	Poles	
Power	0.37	Kw	
Voltage	230	V	
Frequency	50	Hz	
Speed	2800	rpm	
Nominal current	2.74	A	
Power factor	0.92		
Efficiency 100%	63.9	%	
Efficiency 75%	-	%	
Efficiency 50%	-	%	
Torque	1.26	N.m	
Ta/Tn	2.3		
Ia/In	5.1		
Tm/Tn	1.7		

Mechanical Data

Shaft height	-
Construction form	B5
Mechanical protection	55
Heating class	B
Insulation class	F
Service	S3-70%
Ambient temp.	-10°C-40°C
Altitude	1000
Noise	- dB(A)
Weight	5.8 kg
Bearing DE	6202 2Z C3
Bearing NDE	6202 2Z C3

Extra Data

Applicable brakes

DC brake	NA	Brake torque	NA	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	35	W
Three-phase forced ventilation	Power	NA	W