



Technical Data Sheet
Electric Motor 1 phase in Aluminum IE1



UNIVERSAL
MOTORS

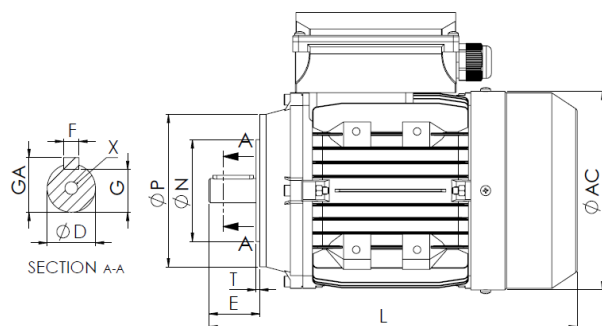

L (standard motor)

285

L (motor w/brake)

NA

L (motor w/forced ventilation)

393

L (motor without ventilation)

248

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	19j6	40	6	15.5	21.5	M6x16	-	-	158	148	100	80	120	M6	3

Electrical Data

Type	UCC 80G-2	
Poles	2/3000	Poles
Power	1.10	Kw
Voltage	230	V
Frequency	50	Hz
Speed	2800	rpm
Nominal current	6.71	A
Power factor	0.95	
Efficiency 100%	75.0	%
Efficiency 75%	-	%
Efficiency 50%	-	%
Torque	3.75	N.m
Ta/Tn	2.5	
Ia/In	5.2	
Tm/Tn	1.7	

Mechanical Data

Shaft height	-
Construction form	B14
Mechanical protection	55
Heating class	B
Insulation class	F
Service	S3-70%
Ambient temp.	-10°C-40°C
Altitude	1000
Noise	- dB(A)
Weight	11.3 kg
Bearing DE	6204 2Z C3
Bearing NDE	6204 2Z C3

Extra Data

Applicable brakes

DC brake	NA	Brake torque	NA	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	45	W
Three-phase forced ventilation	Power	NA	W