


Technical Data Sheet  
Electric Motor 1 phase in Aluminum IE1

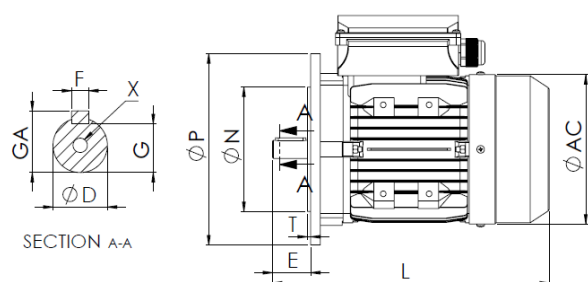

L (standard motor)

354

L (motor w/brake)

NA

L (motor w/forced ventilation)

458

L (motor without ventilation)

311

| Feet |   |   |   |   | Shaft |    |   |    |    |       | Carcass |    |     |     | Flange |     |     |    |     |
|------|---|---|---|---|-------|----|---|----|----|-------|---------|----|-----|-----|--------|-----|-----|----|-----|
| H    | A | B | C | K | D     | E  | F | G  | GA | X     | AB      | BB | AC  | HD  | M      | N   | P   | S  | T   |
| -    | - | - | - | - | 24j6  | 50 | 8 | 20 | 27 | M8x19 | -       | -  | 176 | 155 | 165    | 130 | 200 | 12 | 3.5 |

### Electrical Data

|                 |           |       |  |
|-----------------|-----------|-------|--|
| Type            | UCC 90L-2 |       |  |
| Poles           | 2/3000    | Poles |  |
| Power           | 2.20      | Kw    |  |
| Voltage         | 230       | V     |  |
| Frequency       | 50        | Hz    |  |
| Speed           | 2800      | rpm   |  |
| Nominal current | 12.60     | A     |  |
| Power factor    | 0.95      |       |  |
| Efficiency 100% | 79.7      | %     |  |
| Efficiency 75%  | -         | %     |  |
| Efficiency 50%  | -         | %     |  |
| Torque          | 7.51      | N.m   |  |
| Ta/Tn           | 2.2       |       |  |
| Ia/In           | 5.3       |       |  |
| Tm/Tn           | 1.7       |       |  |

### Mechanical Data

|                       |            |
|-----------------------|------------|
| Shaft height          | -          |
| Construction form     | B5         |
| Mechanical protection | 55         |
| Heating class         | B          |
| Insulation class      | F          |
| Service               | S3-70%     |
| Ambient temp.         | -10°C-40°C |
| Altitude              | 1000       |
| Noise                 | - dB(A)    |
| Weight                | 16 kg      |
| Bearing DE            | 6205 2Z C3 |
| Bearing NDE           | 6204 2Z C3 |

### Extra Data

#### Applicable brakes

|          |    |              |    |     |
|----------|----|--------------|----|-----|
| DC brake | NA | Brake torque | NA | N.m |
| AC brake | NA | Brake torque | NA | N.m |

#### Applicable forced ventilations

|                                 |       |    |   |
|---------------------------------|-------|----|---|
| Single-phase forced ventilation | Power | 45 | W |
| Three-phase forced ventilation  | Power | NA | W |