


Technical Data Sheet
Electric Motor Three phase in Aluminum IE3

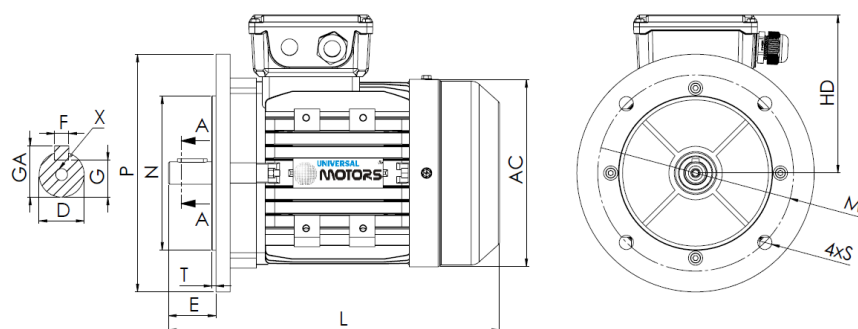

L (standard motor)

477

L (motor w/brake)

570

L (motor w/forced ventilation)

605

L (motor without ventilation)

371

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	38k6	80	10	33	41	M12x28	-	-	265	198	265	230	300	15	4

Electrical Data

Type	PE31/UM3A* 132S-4		
Poles	4/1500	Poles	
Power	5.50	Kw	
Voltage	400	V	
Frequency	50	Hz	
Speed	1455	rpm	
Nominal current	10.80	A	
Power factor	0.82		
Efficiency 100%	89.6	%	
Efficiency 75%	89.7	%	
Efficiency 50%	88.9	%	
Torque	36.1	N.m	
Ta/Tn	2		
Ia/In	7.5		
Tm/Tn	2.3		

Mechanical Data

Shaft height	-	
Construction form	B5	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S1	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	75	dB(A)
Weight	52	kg
Bearing DE	6308 2Z C3	
Bearing NDE	6308 2Z C3	

Extra Data

Applicable brakes

DC brake	REB-05-16	Brake torque	80	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	55	W
Three-phase forced ventilation	Power	55	W