


Technical Data Sheet
Electric Motor Three phase in Cast Iron IE3

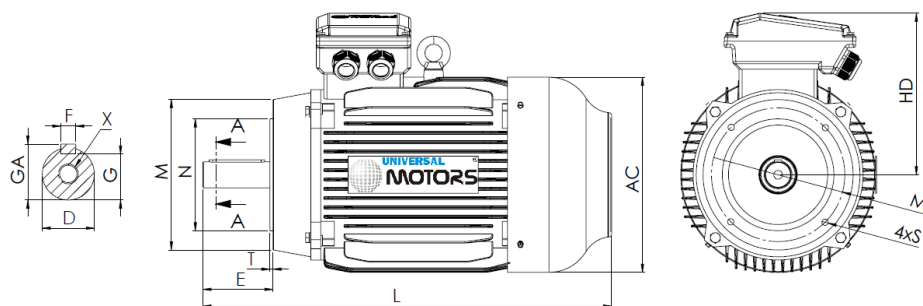

L (standard motor)

445

L (motor w/brake)

550

L (motor w/forced ventilation)

550

L (motor without ventilation)

410

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	28j6	60	8	24	31	M10x22	-	-	220	193	130	110	160	4xM8	3.5

Electrical Data

Type	PE30/UM3C*	
	112M-2	
Poles	2/3000	Poles
Power	4.00	Kw
Voltage	400	V
Frequency	50	Hz
Speed	2910	rpm
Nominal current	7.45	A
Power factor	0.88	
Efficiency 100%	88.1	%
Efficiency 75%	88.6	%
Efficiency 50%	87.4	%
Torque	13.1	N.m
Ta/Tn	2.2	
Ia/In	8.3	
Tm/Tn	2.3	

Mechanical Data

Shaft height	-	
Construction form	B14	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S1	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	77	dB(A)
Weight	61	kg
Bearing DE	6306 2Z C3	
Bearing NDE	6306 2Z C3	

Extra Data

Applicable brakes

DC brake	REB-05-14	Brake torque	60	N.m
AC brake	AC6	Brake torque	60	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	80	W
Three-phase forced ventilation	Power	80	W