


Technical Data Sheet
Electric Motor Three phase in Cast Iron IE3



UNIVERSAL
MOTORS

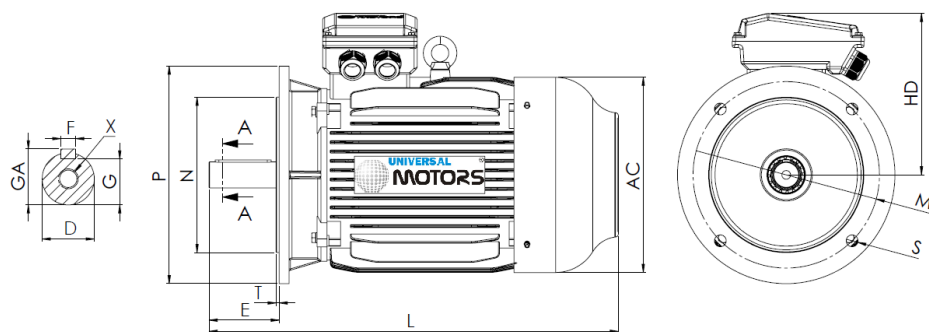

L (standard motor)

510

L (motor w/brake)

655

L (motor w/forced ventilation)

615

L (motor without ventilation)

485

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	38k6	80	10	33	41	M12x28	-	-	259	210	265	230	300	4x15	4

Electrical Data

Type	PE30/UM3C* 132S-8	
Poles	8/750	Poles
Power	2.20	Kw
Voltage	400	V
Frequency	50	Hz
Speed	710	rpm
Nominal current	5.50	A
Power factor	0.71	
Efficiency 100%	81.9	%
Efficiency 75%	82.2	%
Efficiency 50%	77.4	%
Torque	29.59	N.m
Ta/Tn	1.8	
Ia/In	6.0	
Tm/Tn	2	

Mechanical Data

Shaft height	-
Construction form	B5
Mechanical protection	55
Heating class	B
Insulation class	F
Service	S1
Ambient temp.	-10°C-40°C
Altitude	1000
Noise	64 dB(A)
Weight	70.5 kg
Bearing DE	6308 2Z C3
Bearing NDE	6308 2Z C3

Extra Data

Applicable brakes

DC brake	REB-05-16	Brake torque	80	N.m
AC brake	AC7	Brake torque	90	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	55	W
Three-phase forced ventilation	Power	55	W