


Technical Data Sheet
Electric Motor Three phase in Cast Iron IE3

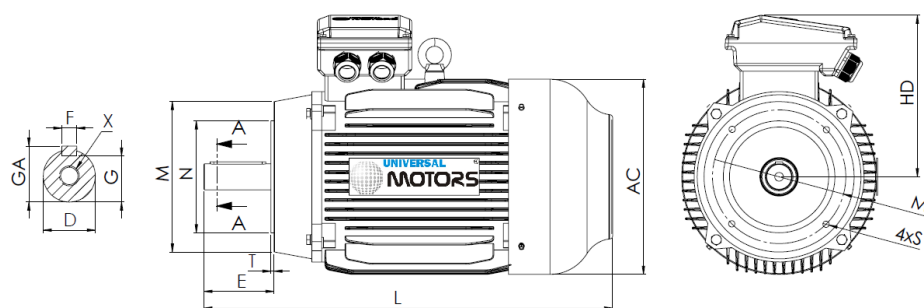

L (standard motor)

685

L (motor w/brake)

NA

L (motor w/forced ventilation)

805

L (motor without ventilation)

595

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	42k6	110	12	37	45	M16x36	-	-	315	255	215	180	250	4xM12	4

Electrical Data

Type	PE30/UM3C*	
	160M1-2	
Poles	2/3000	Poles
Power	11.00	Kw
Voltage	400	V
Frequency	50	Hz
Speed	2950	rpm
Nominal current	19.60	A
Power factor	0.89	
Efficiency 100%	91.2	%
Efficiency 75%	91.5	%
Efficiency 50%	89.9	%
Torque	35.6	N.m
Ta/Tn	2	
Ia/In	8.1	
Tm/Tn	2.3	

Mechanical Data

Shaft height	-	
Construction form	B14	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S1	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	81	dB(A)
Weight	126	kg
Bearing DE	6309 C3	
Bearing NDE	6309 C3	

Extra Data

Applicable brakes

DC brake	NA	Brake torque	NA	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	NA	W
Three-phase forced ventilation	Power	60	W