


Technical Data Sheet
Electric Motor Three phase in Cast Iron IE3

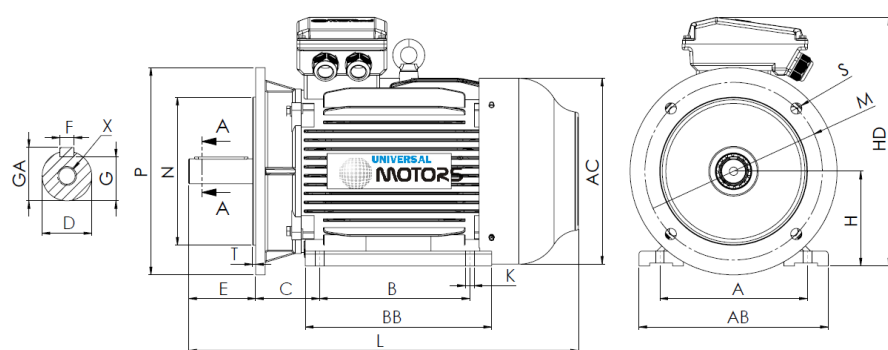

L (standard motor)

1345

L (motor w/brake)

1555

L (motor w/forced ventilation)

1525

L (motor without ventilation)

1170

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
315	508	508	216	28	80m6	170	22	71	85	M20x42	635	680	620	845	600	550	660	8x24	6

Electrical Data

Type	PE30/UM3C*	
	315L1-8	
Poles	8/750	Poles
Power	90.00	Kw
Voltage	400	V
Frequency	50	Hz
Speed	735	rpm
Nominal current	169.60	A
Power factor	0.82	
Efficiency 100%	93.4	%
Efficiency 75%	93.5	%
Efficiency 50%	92.0	%
Torque	1169.3	N.m
Ta/Tn	1.8	
Ia/In	6.4	
Tm/Tn	2	

Mechanical Data

Shaft height	315	
Construction form	B35	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S3-70%	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	82	dB(A)
Weight	1182	kg
Bearing DE	NU 319	
Bearing NDE	6319 C3	

Extra Data

Applicable brakes

DC brake	K11D	Brake torque	2000/2800	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	NA	W
Three-phase forced ventilation	Power	450	W

Universal Motors S.A.
Rua Comendador Brandão, 484
4495-375 Póvoa de Varzim
geral@universalmotors.pt
TEL.: 252 299 080

Universal Motors UK, Ltd
Unit E2, Meltham Mills Road
West Yorkshire HD9 4AR
enquiries@universalmotors-group.co.uk
TEL.: +44(0) 1484660222

Universal Motors SL
C/La Habana n.6 nave 4 Pl Camporoso
28806 Alcala de Henares
info@universalmotors-group.es
TEL.: 918 864 213