


Technical Data Sheet
Electric Motor Three phase in Cast Iron IE4

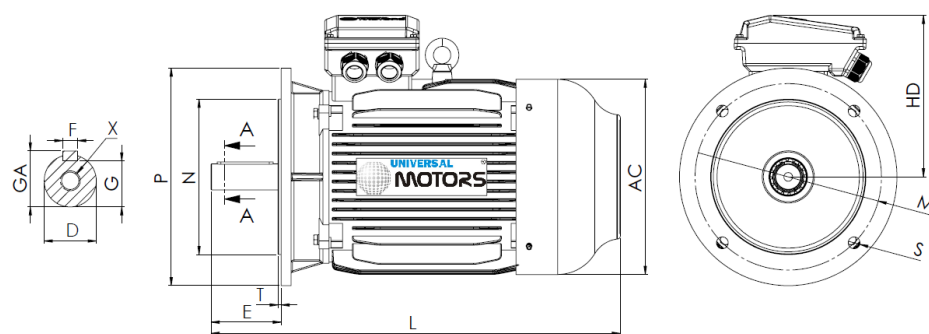

L (standard motor)

1315

L (motor w/brake)

NA

L (motor w/forced ventilation)

1495

L (motor without ventilation)

1140

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	65m6	140	18	58	69	M20x42	-	-	620	530	600	550	660	8x24	6

Electrical Data

Type	UM4C 315L2-2	
Poles	2/3000	Poles
Power	200.00	Kw
Voltage	400	V
Frequency	50	Hz
Speed	2980	rpm
Nominal current	336.13	A
Power factor	0.89	
Efficiency 100%	96.5	%
Efficiency 75%	96.4	%
Efficiency 50%	95.5	%
Torque	640.939597315436 N.m	
Ta/Tn	1.8	
Ia/In	8.5	
Tm/Tn	2.2	

Mechanical Data

Shaft height	-	
Construction form	B5	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S1	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	92	dB(A)
Weight	1134	kg
Bearing DE	6317 C3	
Bearing NDE	6317 C3	

Extra Data

Applicable brakes

DC brake	NA	Brake torque	NA	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	NA	W
Three-phase forced ventilation	Power	450	W