


Technical Data Sheet
Electric Motor Three phase in Cast Iron IE4

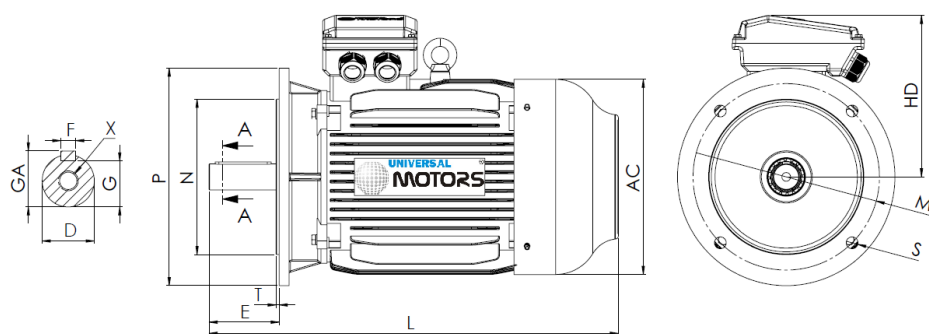

L (standard motor)

1505

L (motor w/brake)

NA

L (motor w/forced ventilation)

1740

L (motor without ventilation)

1370

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	75m6	140	20	67.5	79.5	M20x42	-	-	698	655	740	680	800	8x24	6

Electrical Data

Type	UM4C 355L-2	
Poles	2/3000	Poles
Power	315.00	Kw
Voltage	400	V
Frequency	50	Hz
Speed	2980	rpm
Nominal current	517.77	A
Power factor	0.91	
Efficiency 100%	96.5	%
Efficiency 75%	96.4	%
Efficiency 50%	95.5	%
Torque	1009.4	N.m
Ta/Tn	1.6	
Ia/In	8.5	
Tm/Tn	2.2	

Mechanical Data

Shaft height	-	
Construction form	B5	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S1	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	97	dB(A)
Weight	1880	kg
Bearing DE	6319 C3	
Bearing NDE	6319 C3	

Extra Data

Applicable brakes

DC brake	NA	Brake torque	NA	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	NA	W
Three-phase forced ventilation	Power	700	W