


Technical Data Sheet
Electric Motor Three phase in Aluminum IE1

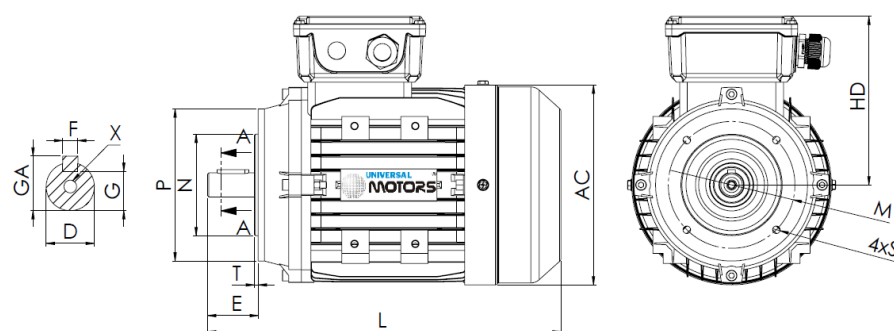

L (standard motor)

198

L (motor w/brake)

NA

L (motor w/forced ventilation)

NA

L (motor without ventilation)

165

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	9j6	20	3	7.2	10.2	M3x9	-	-	117	107	65	50	80	M5	2.5

Electrical Data

Type	BF31/UMA* 56M3-4		
Poles	4/1500	Poles	
Power	0.12	Kw	
Voltage	400	V	
Frequency	50	Hz	
Speed	1380	rpm	
Nominal current	0.60	A	
Power factor	0.56		
Efficiency 100%	50.0	%	
Efficiency 75%	-	%	
Efficiency 50%	-	%	
Torque	0.83	N.m	
Ta/Tn	2.4		
Ia/In	5.0		
Tm/Tn	2.4		

Mechanical Data

Shaft height	-
Construction form	B14
Mechanical protection	55
Heating class	B
Insulation class	F
Service	S3-70%
Ambient temp.	-10°C-40°C
Altitude	1000
Noise	51 dB(A)
Weight	3.8 kg
Bearing DE	6201 2Z C3
Bearing NDE	6201 2Z C3

Extra Data

Applicable brakes

DC brake	NA	Brake torque	NA	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	NA	W
Three-phase forced ventilation	Power	NA	W