


Technical Data Sheet
Electric Motor Three phase in Aluminum IE1



UNIVERSAL
MOTORS

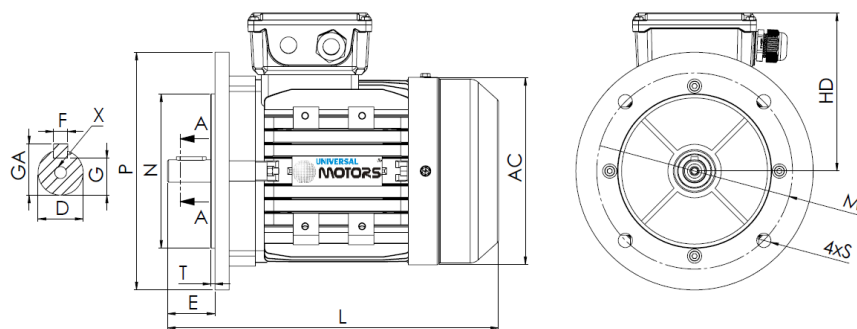

L (standard motor)

250

L (motor w/brake)

300

L (motor w/forced ventilation)

360

L (motor without ventilation)

208

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	14j6	30	5	11	16	M5x12	-	-	147	119	130	110	160	10	3.5

Electrical Data

Type	BF31/UMA* 71M1-6	
Poles	6/1000	Poles
Power	0.18	Kw
Voltage	400	V
Frequency	50	Hz
Speed	900	rpm
Nominal current	0.72	A
Power factor	0.61	
Efficiency 100%	59.0	%
Efficiency 75%	-	%
Efficiency 50%	-	%
Torque	1.91	N.m
Ta/Tn	2	
Ia/In	5.5	
Tm/Tn	2.1	

Mechanical Data

Shaft height	-
Construction form	B5
Mechanical protection	55
Heating class	B
Insulation class	F
Service	S3-70%
Ambient temp.	-10°C-40°C
Altitude	1000
Noise	52 dB(A)
Weight	6.1 kg
Bearing DE	6202 2Z C3
Bearing NDE	6202 2Z C3

Extra Data

Applicable brakes

DC brake	REB-05-06	Brake torque	4	N.m
AC brake	AC2	Brake torque	10	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	35	W
Three-phase forced ventilation	Power	35	W