


Technical Data Sheet
Electric Motor Three phase in Aluminum IE1

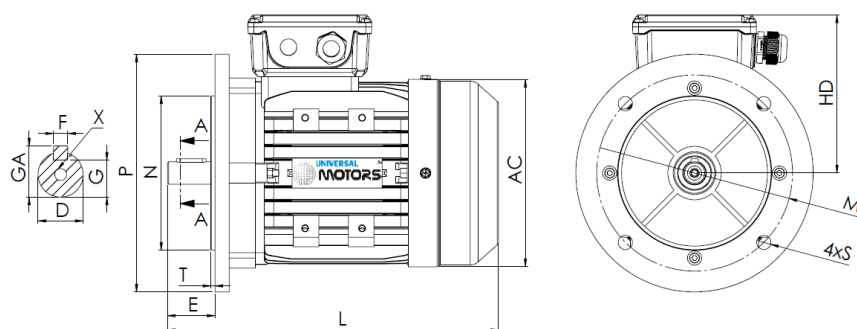

L (standard motor)

278

L (motor w/brake)

345

L (motor w/forced ventilation)

390

L (motor without ventilation)

247

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	19j6	40	6	15.5	21.5	M6x16	-	-	165	140	165	130	200	12	3.5

Electrical Data

Type	BF31/UMA* 80M1-4		
Poles	4/1500	Poles	
Power	0.55	Kw	
Voltage	400	V	
Frequency	50	Hz	
Speed	1400	rpm	
Nominal current	1.49	A	
Power factor	0.73		
Efficiency 100%	73.5	%	
Efficiency 75%	-	%	
Efficiency 50%	-	%	
Torque	3.75	N.m	
Ta/Tn	2.4		
Ia/In	6.0		
Tm/Tn	2.4		

Mechanical Data

Shaft height	-	
Construction form	B5	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S3-70%	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	58	dB(A)
Weight	9.5	kg
Bearing DE	6204 2Z C3	
Bearing NDE	6204 2Z C3	

Extra Data

Applicable brakes

DC brake	REB-05-08	Brake torque	8	N.m
AC brake	AC3	Brake torque	15	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	45	W
Three-phase forced ventilation	Power	45	W