


Technical Data Sheet
Electric Motor Three phase in Aluminum IE2

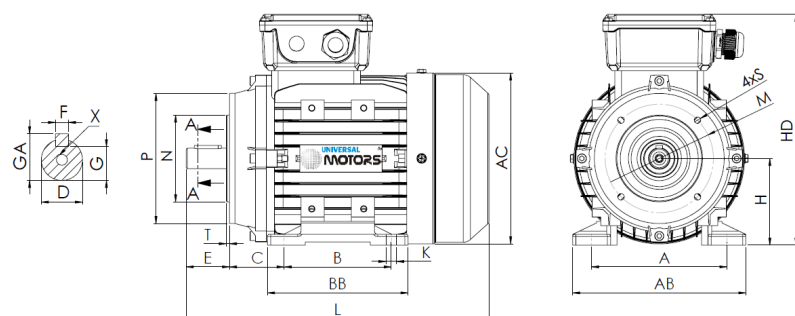

L (standard motor)

384

L (motor w/brake)

460

L (motor w/forced ventilation)

495

L (motor without ventilation)

339

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
100	160	140	63	12	28j6	60	8	24	31	M10x22	198	176	205	252	130	110	160	M8	3.5

Electrical Data

Type	HE31/UMHA*	
	100L3-4	
Poles	4/1500	Poles
Power	4.00	Kw
Voltage	400	V
Frequency	50	Hz
Speed	1430	rpm
Nominal current	8.05	A
Power factor	0.83	
Efficiency 100%	86.6	%
Efficiency 75%	88.4	%
Efficiency 50%	88.3	%
Torque	26.71	N.m
Ta/Tn	2.1	
Ia/In	7.0	
Tm/Tn	2.7	

Mechanical Data

Shaft height	100	
Construction form	B34	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S3-70%	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	72	dB(A)
Weight	30.2	kg
Bearing DE	6206 2Z C3	
Bearing NDE	6206 2Z C3	

Extra Data

Applicable brakes

DC brake	REB-05-12	Brake torque	32	N.m
AC brake	AC5	Brake torque	40	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	65	W
Three-phase forced ventilation	Power	65	W