


Technical Data Sheet
Electric Motor Three phase in Aluminum IE2

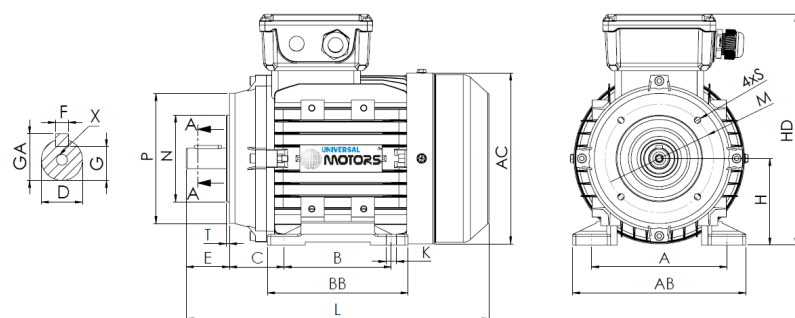

L (standard motor)

417

L (motor w/brake)

520

L (motor w/forced ventilation)

515

L (motor without ventilation)

370

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
112	190	140	70	12	28j6	60	8	24	31	M10x22	220	180	230	286	130	110	160	M8	3.5

Electrical Data

Type	HE31/UMHA*	
	112M2-4	
Poles	4/1500	Poles
Power	5.50	Kw
Voltage	400	V
Frequency	50	Hz
Speed	1440	rpm
Nominal current	10.52	A
Power factor	0.86	
Efficiency 100%	87.7	%
Efficiency 75%	89.2	%
Efficiency 50%	89.0	%
Torque	36.47	N.m
Ta/Tn	3	
Ia/In	8.0	
Tm/Tn	3.1	

Mechanical Data

Shaft height	112	
Construction form	B34	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S3-70%	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	75	dB(A)
Weight	41.2	kg
Bearing DE	6306 2Z C3	
Bearing NDE	6306 2Z C3	

Extra Data

Applicable brakes

DC brake	REB-05-14	Brake torque	60	N.m
AC brake	AC6	Brake torque	60	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	80	W
Three-phase forced ventilation	Power	80	W