


Technical Data Sheet
Electric Motor Three phase in Aluminum IE2

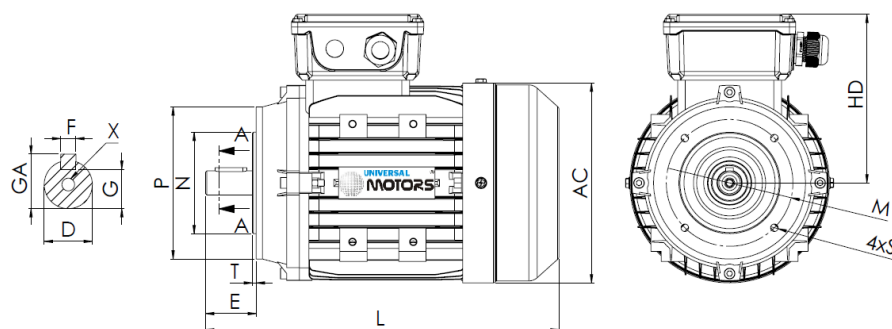

L (standard motor)

390

L (motor w/brake)

490

L (motor w/forced ventilation)

505

L (motor without ventilation)

340

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	28j6	60	8	24	31	M10x22	-	-	230	178	130	110	160	M8	3.5

Electrical Data

Type	HE31/UMHA*	
	112M2-6	
Poles	6/1000	Poles
Power	3.00	Kw
Voltage	400	V
Frequency	50	Hz
Speed	950	rpm
Nominal current	7.05	A
Power factor	0.74	
Efficiency 100%	83.3	%
Efficiency 75%	84.5	%
Efficiency 50%	83.1	%
Torque	30.16	N.m
Ta/Tn	2.6	
Ia/In	6.0	
Tm/Tn	2.8	

Mechanical Data

Shaft height	-	
Construction form	B14	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S3-70%	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	30.16	dB(A)
Weight	70	kg
Bearing DE	6306 2Z C3	
Bearing NDE	6306 2Z C3	

Extra Data

Applicable brakes

DC brake	NA	Brake torque	NA	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	80	W
Three-phase forced ventilation	Power	80	W