


Technical Data Sheet

Electric Motor Three phase in Aluminum IE2

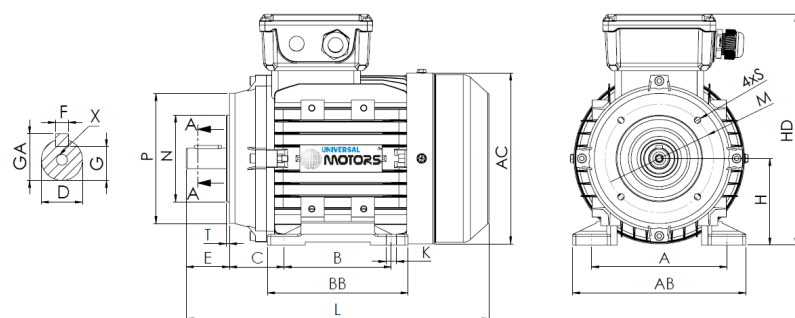

L (standard motor)

313

L (motor w/brake)

385

L (motor w/forced ventilation)

425

L (motor without ventilation)

279

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
90	140	125	56	10	24j6	50	8	20	27	M8x19	175	155	182	235	115	95	140	M8	3

Electrical Data

Type	HE31/UMHA*	
	90L2-2	
Poles	2/3000	Poles
Power	3.00	Kw
Voltage	400	V
Frequency	50	Hz
Speed	2850	rpm
Nominal current	5.96	A
Power factor	0.86	
Efficiency 100%	84.6	%
Efficiency 75%	86.1	%
Efficiency 50%	85.6	%
Torque	10.05	N.m
Ta/Tn	3.1	
Ia/In	8.5	
Tm/Tn	3.5	

Mechanical Data

Shaft height	90	
Construction form	B34	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S3-70%	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	82	dB(A)
Weight	18.5	kg
Bearing DE	6205 2Z C3	
Bearing NDE	6204 2Z C3	

Extra Data

Applicable brakes

DC brake	REB-05-10	Brake torque	16	N.m
AC brake	AC4	Brake torque	20	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	45	W
Three-phase forced ventilation	Power	45	W