


Technical Data Sheet
Electric Motor Three phase in Aluminum IE2

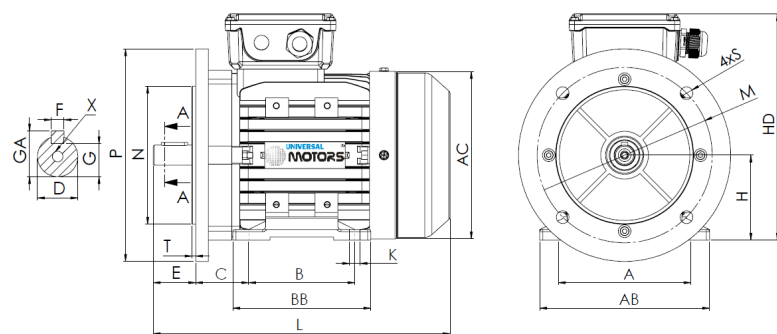

L (standard motor)

313

L (motor w/brake)

385

L (motor w/forced ventilation)

425

L (motor without ventilation)

279

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
90	140	125	56	10	24j6	50	8	20	27	M8x19	175	155	182	235	165	130	200	12	3.5

Electrical Data

Type	HE31/UMHA*	
	90L2-4	
Poles	4/1500	Poles
Power	2.20	Kw
Voltage	400	V
Frequency	50	Hz
Speed	1450	rpm
Nominal current	4.66	A
Power factor	0.81	
Efficiency 100%	84.3	%
Efficiency 75%	84.8	%
Efficiency 50%	83.4	%
Torque	14.49	N.m
Ta/Tn	2.3	
Ia/In	7.5	
Tm/Tn	2.3	

Mechanical Data

Shaft height	90	
Construction form	B35	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S3-70%	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	70	dB(A)
Weight	25	kg
Bearing DE	6205 2Z C3	
Bearing NDE	6204 2Z C3	

Extra Data

Applicable brakes

DC brake	REB-05-10	Brake torque	16	N.m
AC brake	AC4	Brake torque	20	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	45	W
Three-phase forced ventilation	Power	45	W