


Technical Data Sheet
Electric Motor Three phase in Aluminum IE2

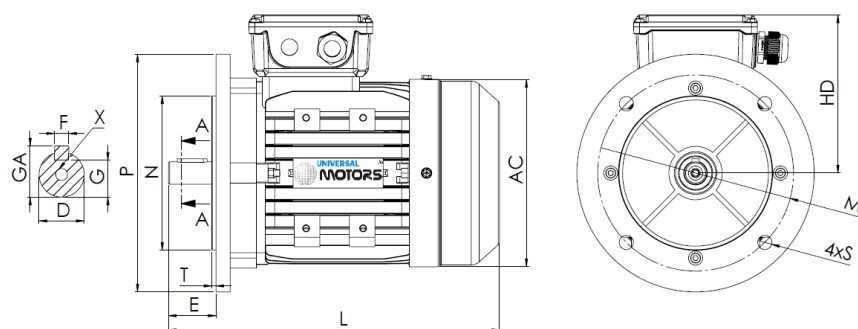

L (standard motor)

313

L (motor w/brake)

385

L (motor w/forced ventilation)

425

L (motor without ventilation)

279

Feet					Shaft						Carcass				Flange				
H	A	B	C	K	D	E	F	G	GA	X	AB	BB	AC	HD	M	N	P	S	T
-	-	-	-	-	24j6	50	8	20	27	M8x19	-	-	182	150	165	130	200	12	3.5

Electrical Data

Type	HE31/UMHA*	
	90L2-6	
Poles	6/1000	Poles
Power	1.50	Kw
Voltage	400	V
Frequency	50	Hz
Speed	920	rpm
Nominal current	3.62	A
Power factor	0.75	
Efficiency 100%	79.8	%
Efficiency 75%	81.9	%
Efficiency 50%	80.8	%
Torque	15.57	N.m
Ta/Tn	2.2	
Ia/In	5.0	
Tm/Tn	2.3	

Mechanical Data

Shaft height	-	
Construction form	B5	
Mechanical protection	55	
Heating class	B	
Insulation class	F	
Service	S3-70%	
Ambient temp.	-10°C-40°C	
Altitude	1000	
Noise	15.57	dB(A)
Weight	64	kg
Bearing DE	6205 2Z C3	
Bearing NDE	6204 2Z C3	

Extra Data

Applicable brakes

DC brake	NA	Brake torque	NA	N.m
AC brake	NA	Brake torque	NA	N.m

Applicable forced ventilations

Single-phase forced ventilation	Power	45	W
Three-phase forced ventilation	Power	45	W