



|                    |         |     |
|--------------------|---------|-----|
| MODEL              | UMSG130 |     |
| Ø OUTPUT SHAFT     | 45      | mm  |
| APPROXIMATE RATIO  | 20      |     |
| EXACT RATIO        | 20.00   |     |
| OUTPUT SPEED       | 73      | RPM |
| EXACT OUTPUT SPEED | 73      | RPM |
| INPUT POWER        | 9.20    | KW  |
| INPUT ROTATION     | 1400    | RPM |
| INPUT PAM          | 132B5   |     |
| OUTPUT TORQUE      | 1079.34 | N.m |
| NOMINAL TORQUE     | 915.10  | N.m |
| NOMINAL POWER      | 7.8     | KW  |
| SERVICE FACTOR     | 0.85    |     |
| DYNAMIC EFFICIENCY | 0.86    |     |

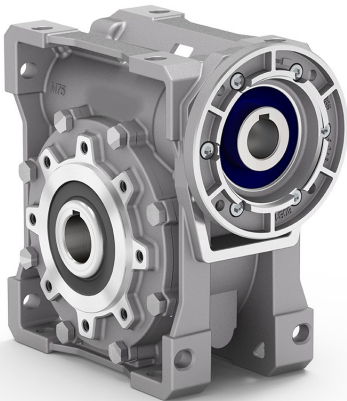


Oil Quantity (L)

| B3/H1 | B6/H4 | B7/H3 | B8/H2 | V5/H5 | V6/H6 |
|-------|-------|-------|-------|-------|-------|
| 4.5   | 3.5   | 3.5   | 3.3   | 4.5   | 3.3   |


Radial and Axial Loads

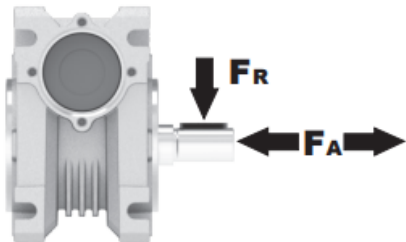


| n <sub>2</sub> [min-1] | FA [N] | FR [N] |
|------------------------|--------|--------|
| 200                    | 960    | 4800   |
| 100                    | 1240   | 6200   |
| 50                     | 1560   | 7800   |
| 15                     | 2400   | 12000  |

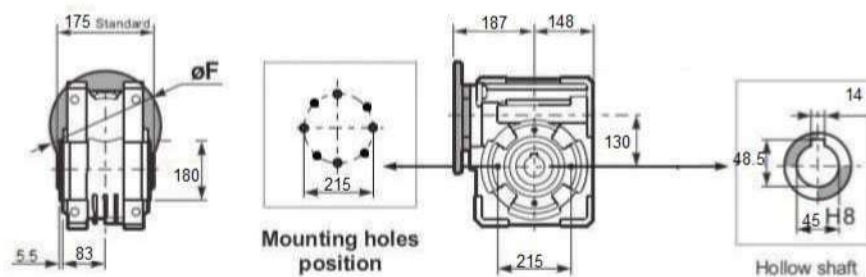

## Square flange FA

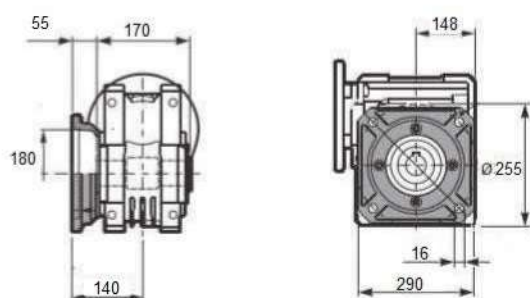


## Single Shaft



| b1 | c1 | d1 | e1 | m1  | n1  | t2   | o1  |
|----|----|----|----|-----|-----|------|-----|
| 14 | 80 | 45 | 85 | 170 | 265 | 48.5 | M16 |

## Feet

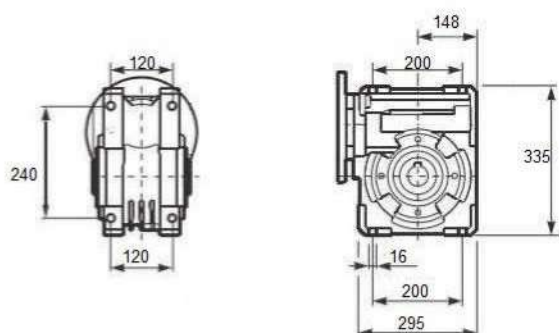

## Reaction arm

