


Technical Data Sheet  
Electric Motor 1 phase in Aluminum IE1

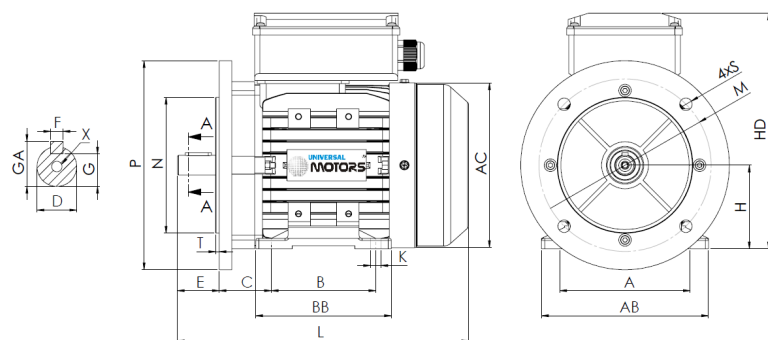

L (standard motor)

250

L (motor w/brake)

NA

L (motor w/forced ventilation)

349

L (motor without ventilation)

218

| Feet |     |    |    |   | Shaft |    |   |    |    |       | Carcass |     |     |     | Flange |     |     |    |     |
|------|-----|----|----|---|-------|----|---|----|----|-------|---------|-----|-----|-----|--------|-----|-----|----|-----|
| H    | A   | B  | C  | K | D     | E  | F | G  | GA | X     | AB      | BB  | AC  | HD  | M      | N   | P   | S  | T   |
| 71   | 112 | 90 | 45 | 7 | 14j6  | 30 | 5 | 11 | 16 | M5x12 | 135     | 110 | 139 | 198 | 130    | 110 | 160 | 10 | 3.5 |

### Electrical Data

|                 |           |       |
|-----------------|-----------|-------|
| Type            | UPC 71G-4 |       |
| Poles           | 4/1500    | Poles |
| Power           | 0.37      | Kw    |
| Voltage         | 230       | V     |
| Frequency       | 50        | Hz    |
| Speed           | 1400      | rpm   |
| Nominal current | 2.65      | A     |
| Power factor    | 0.92      |       |
| Efficiency 100% | 66.0      | %     |
| Efficiency 75%  | -         | %     |
| Efficiency 50%  | -         | %     |
| Torque          | 2.52      | N.m   |
| Ta/Tn           | 0.35      |       |
| Ia/In           | 3.2       |       |
| Tm/Tn           | 1.7       |       |

### Mechanical Data

|                       |            |
|-----------------------|------------|
| Shaft height          | 71         |
| Construction form     | B35        |
| Mechanical protection | 55         |
| Heating class         | B          |
| Insulation class      | F          |
| Service               | S3-70%     |
| Ambient temp.         | -10°C-40°C |
| Altitude              | 1000       |
| Noise                 | - dB(A)    |
| Weight                | 6.5 kg     |
| Bearing DE            | 6202 2Z C3 |
| Bearing NDE           | 6202 2Z C3 |

### Extra Data

#### Applicable brakes

|          |    |              |    |     |
|----------|----|--------------|----|-----|
| DC brake | NA | Brake torque | NA | N.m |
| AC brake | NA | Brake torque | NA | N.m |

#### Applicable forced ventilations

|                                 |       |    |   |
|---------------------------------|-------|----|---|
| Single-phase forced ventilation | Power | 35 | W |
| Three-phase forced ventilation  | Power | NA | W |