

INNOMOTICS GP - 160 M - IM B3 - 2p

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project

Remarks

Safe Area

U [V]	Δ / Y	f [Hz]	P [kW]	P [hp]	I [A]	n [1/min]	M [Nm]	η ³⁾			cosφ ³⁾			I _A /I _N I _L /I _N	M _A /M _N T _I /T _N	M _K /M _N T _B /T _N	IE-CL
DOL duty (S1) - 155(F) to 130(B)																	
400	Δ	50	15.00	-/-	27.50	2955	48.5	91.9	91.9	90.8	0.86	0.81	0.71	10.2	3.5	4.4	IE3
690	Y	50	15.00	-/-	15.90	2955	48.5	91.9	91.9	90.8	0.86	0.81	0.71	10.2	3.5	4.4	IE3
460	Δ	60	17.30	-/-	27.00	3550	46.5	91.7	91.4	90.2	0.88	0.84	0.75	10.1	3.3	4.5	IE3
460	Δ	60	15.00	-/-	24.00	3560	40.0	91.0	90.4	88.5	0.86	0.81	0.71	11.8	4.0	5.2	IE3
IM B3 / IM 1001			FS 160 M			IP55	UKCA	IEC/EN 60034		IEC, DIN, ISO, VDE, EN							
Environmental conditions : -20 °C - +40 °C / 1000 m									Locked rotor time (hot / cold) : 13.30 s 18.90 s								

Sound level (SPL / SWL) at 50Hz 60Hz	77.0 / 85.0 dB(A) ²⁾ ₃₎	81.0 / 89.0 dB(A) ²⁾ ₃₎	Vibration severity grade	A
Moment of inertia	0.0430 kg m ²		Thermal class	F
Bearing DE NDE	6209 2Z C3	6209 2Z C3	Duty type	S1
Bearing lifetime			Direction of rotation	bidirectional
L _{10min} F _{Rad min} for coupling operation 50 60Hz ¹⁾	40000 h	32000 h	Frame material	aluminum
Regreasing device	Without		Net weight of the motor (IM B3)	84 kg
Grease nipple	-/-		Coating (paint finish)	Standard paint finish C2
Type of bearing	Locating bearing NDE		Color, paint shade	RAL7030
Condensate drainage holes	Without		Motor protection	(A) without (Standard)
External earthing terminal	Without		Method of cooling	IC411 - self ventilated, surface cooled
			Carbon footprint (without options)	387kg

Terminal box position	top	Max. cross-sectional area	16.0 mm²
Material of terminal box	Aluminium	Main cable entry	2xM40x1.5
Type of terminal box	TB1J00	Main cable gland	2 plugs
Contact screw thread	6xM5		

3) Value is valid only for DOL operation with motor design IC411

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Responsible department IN LV	Technical reference	Created by IPC	Approved by	Technical data are subject to change! There may be discrepancies between calculated and rating plate values.		Link documents	
INNOMOTICS	Document type Technical data sheet			Document status Released			
	Document title 1LE1003-1DA33-4AA4-Z H01			Document number TDS-260512-133736			
Restricted © Innomotics 2026				Revision AA	Creation date 2026-05-12	Language en	Page 1/2

Data sheet for three-phase Squirrel-Cage-Motors Innomotics



Motor type : 1AV3163A

INNOMOTICS GP - 160 M - IM B3 - 2p

Special design

H01

Bolted on mounting feet (instead of cast)

I_s/I_N = locked rotor current / current nominal

M_s/M_N = locked rotor torque / torque nominal

M_b/M_N = break down torque / nominal torque



1) $L_{100\%}$ according to DIN ISO 281 10/2010

2) at rated power / at full load

3) Value is valid only for DOL operation with motor design IC411

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Responsible department	Technical reference	Created by	Approved by	Technical data are subject to change! There may be discrepancies between calculated and rating plate values.		Link documents	
IN LV		IPC					
INNOMOTICS	Document type			Document status			
	Technical data sheet			Released			
Restricted	Document title			Document number			
	1LE1003-1DA33-4AA4-Z H01			TDS-260512-133736			
© Innomotics 2026				Revision	Creation date	Language	Page
				AA	2026-05-12	en	2/2

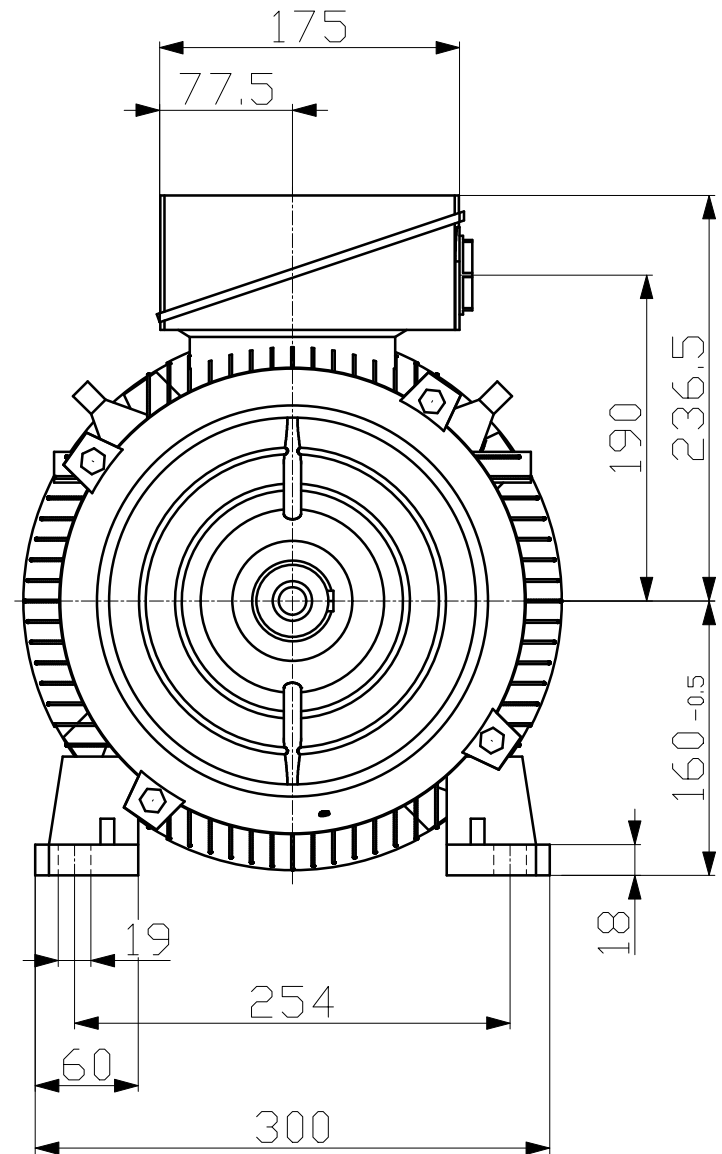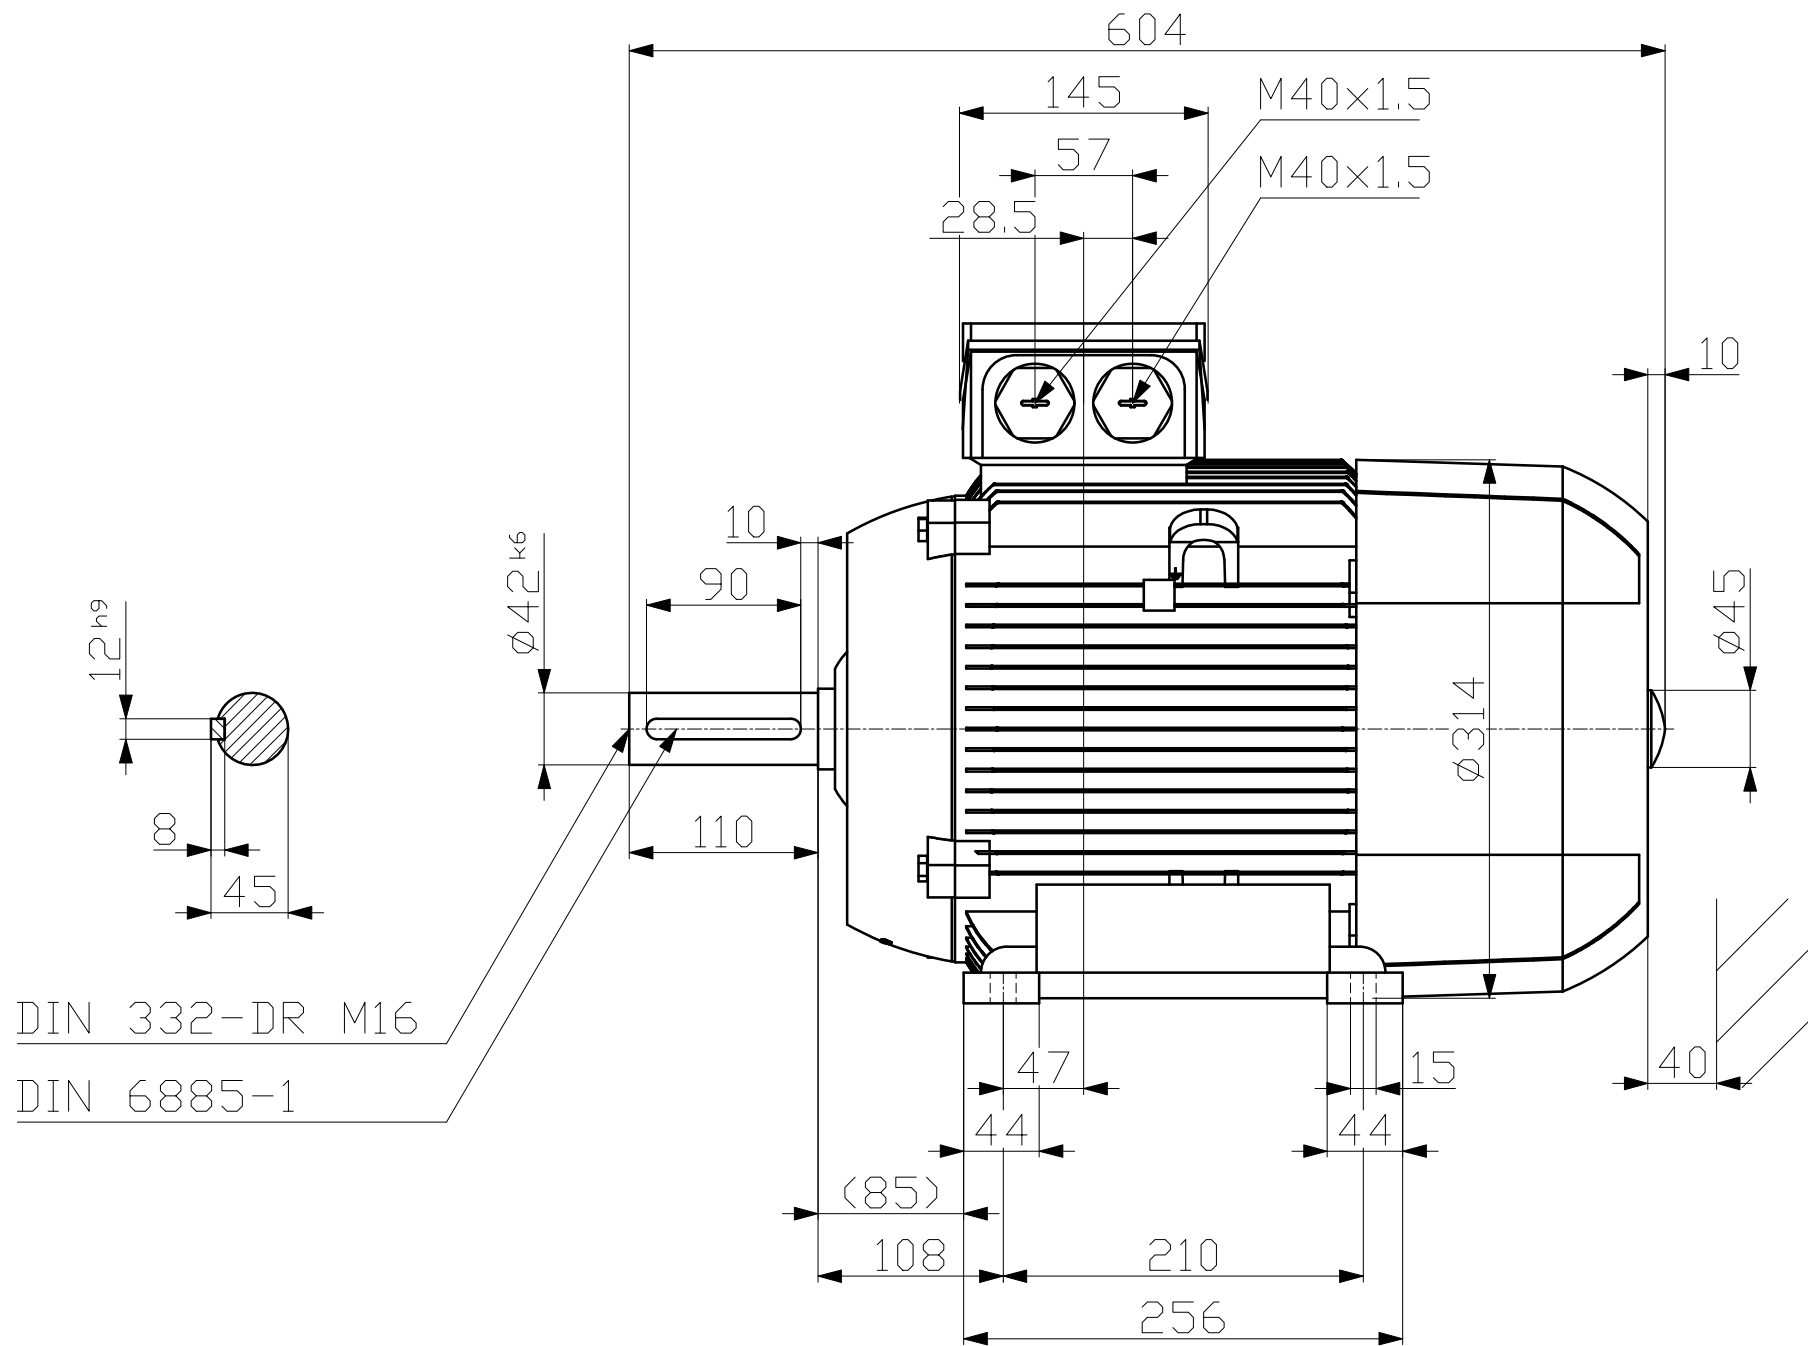

Tolerance	Surface	Material	Weight	Scale  mm
1LE1003-1DA33-4AA4-Z H01	Author	Dimensional drawing Maßzeichnung		
	Creator12/05/2026IPC			
	ApprovalCreated automatically			
	DepartmentIN LVM			
	Change Order	MLFB	Doc Type	
	Doc StateReleased	Item No	Paper Size	A3
	RevisionAAIndexRS	Doc No	1st Languageen 2nd Languagede	
© Innomotics2026	Project No	Ref No	Sheet	1 of 1

Technische Änderungen vorbehalten!
Technical data are subject to change!